



RXCM-LED

Cleanroom **LED** Corner
PRODUCT SPECIFICATION

Cleanrooms, laboratories, research facilities,
kitchen areas, natatoriums

Mounting

Surface mounts to corner.

Housing

18 gauge cold rolled steel with seams welded
and ground smooth. 304 Stainless steel available.

Door

Overlapping, 18 gauge cold rolled steel door
with 14 gauge lens retainers. 304 Stainless steel available.

Internal Lens

Optic Plus lens (standard) completely hides diode image
while providing greater than 90% light transmission.

Finish

Polyester powder-coated after phosphate
pretreatment for superior adhesion and corrosion
resistance. Brushed stainless steel available.

Hardware

Stainless steel fasteners.

Driver

0-10Vdc 1% dimming, >0.9 PF, <20% THD
Factory programmable, Operating temp -40°C Min. to 50°C Max

Wiring

Driver provided with pre-wired 3-wire self-aligning
input power quick disconnect and 2-wire quick
disconnect to LED module.

Certifications

UL Listed wet location. IP66, and NEMA4 / 4X Rated. Suitable
for use in ISO-3 clean rooms (209E Class 1). Suitable for use in
Natatorium Environments. USP 797 and USP 800 compliant.


Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

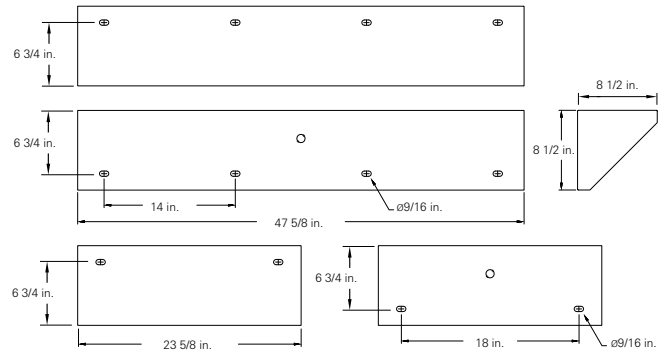

RXCM one two three four five six seven eight nine ten eleven
- - - - - VAR DM - - -

one Luminaire Size

- 2 2 ft fixture
- 4 4 ft fixture

two LED Source

Refer to the LED Source Table
on Page 2 for available options.

three Color Temperature

- 30 3000K
- 35 3500K
- 40 4000K
- 50 5000K

four CRI

- 80 80 CRI
- 90 90 CRI

five Material

- A Aluminum
- C Cold rolled steel, standard
- S 304 Stainless steel

six Finish

- R Brushed (Stainless steel only)
- W White

seven Voltage

- VAR Variable, 120-277 V, 50/60Hz

eight Driver

- DM 0-10Vdc Dimming, standard

nine Internal Lens

- 122 Optic Plus LED diffusing acrylic, standard
- 122R Optic Plus with RF grid, Must be used with RF filter*
- 130 .125 in. LED diffusing Lexan

ten Electrical access

- A 2.250 in. diameter access hole
- K 0.875 in. diameter knockout

eleven Options

- 2C Two-circuit wired
- AM Anti-microbial coating (exposed areas)
- CU Canadian UL Listing
- EM Emergency battery backup
- FH Fuse and holder
- IMS Integral Occ Sensor
- NL-LED Night light, LED
- RF Radio interference filter, one per circuit*
- TP Stainless steel torx head fasteners
- WM Wall mount (No top holes)



Must use aluminum or stainless steel housing and doors for natatorium use.

Modifications are available to meet custom requirements.
Specifications and dimensions are subject to change without notice.

| CRI | LED Life |
|-----|----------|
| >80 | >100,000 |

| LED Source (Box 2) | 3000K | | 3500K | | 4000K | | 5000K | | Input Watts |
|--------------------|------------------|-----|------------------|-----|------------------|-----|------------------|-----|-------------|
| | Delivered Lumens | L/W | Delivered Lumens | L/W | Delivered Lumens | L/W | Delivered Lumens | L/W | |
| 2' Fixture | | | | | | | | | |
| 1W21 | 2022 | 118 | 2052 | 120 | 2113 | 124 | 2173 | 127 | 17.1 |
| 1W34 | 3332 | 116 | 3382 | 118 | 3481 | 121 | 3580 | 125 | 28.7 |
| 2W52 | 4979 | 126 | 5053 | 128 | 5202 | 131 | 5350 | 135 | 39.6 |
| 4' Fixture | | | | | | | | | |
| 1W34 | 3309 | 127 | 3358 | 129 | 3457 | 132 | 3555 | 136 | 26.1 |
| 1W54 | 5198 | 127 | 5276 | 129 | 5431 | 132 | 5586 | 136 | 41.0 |
| 1W69 | 6664 | 122 | 6763 | 123 | 6962 | 127 | 7161 | 131 | 54.8 |
| 2W94 | 9063 | 127 | 9198 | 129 | 9469 | 132 | 9739 | 136 | 71.5 |
| 2W113 | 10831 | 126 | 10993 | 128 | 11316 | 132 | 11639 | 135 | 86.0 |
| 2W139 | 13327 | 122 | 13526 | 123 | 13924 | 127 | 14322 | 131 | 109.6 |

Delivered lumen output calculated using 122 inner lens (Highlighted below).

| Lens Multiplier - Use the multipliers below to adjust the delivered lumens | | |
|----------------------------------------------------------------------------|------------------------------|------|
| Internal Lens | | |
| 122 | Optic Plus diffusing acrylic | 1.00 |
| 130 | .118 opal polycarbonate | .94 |

Specified Output Option

L.C. Doane programmable drivers allows us to deliver a specific lumen output. If none of the options in the chart above fit your application, let us know the desired lumen output and we will do the rest. See the example how this will be specified.

Example Model:

RXCM-XX¹SO-40/80-DCW-VARDM-122/32-(XX²/LUMENS)

LUMENS = You provide the lumens.

XX¹ = We will determine the number of rows.

XX² = We will provide the wattage information.

Photometric Data @ 80 CRI with 122 lens

Use the multipliers below to adjust the delivered lumens

| | |
|--------------------|-----|
| 33 lens multiplier | .86 |
| 90 CRI multiplier | .83 |

