

M208 Series

Low Profile Luminaire

The M208 Series is designed for commercial marine and wet location surface mount ceiling applications. The design is drip-proof and easy to install and service. It's constructed from marine grade aluminum with a prismatic polycarbonate lens.



Housing One piece, low profile aluminum housing with a liquid tight cord grip.

Lens One piece 5/32" prismatic polycarbonate lens.

Lamps Two T8 fluorescent lamps with lamp-locks.

Finish White, powder coat polyester, inside and out, phosphate pretreated to ensure superior adhesion and corrosion resistance.

Ballast Standard universal 120-277 VAC, 50/60 Hz, electronic ballast. Consult factory for other options.

Features

- » 2' or 4' fixture lengths
- » Drip-proof
- » UL 1598A marine
- » IP 55
- » U.S.C.G. - ABS



Applications

- » Narrow places
- » Passageways
- » Work stations

Dimensions *dimensions and specifications subject to change without notification*

Weight: 4 ft. unit = 8.7 lbs. (3.9 kg)

2 ft. unit = 5.5 lbs. (2.5 kg)

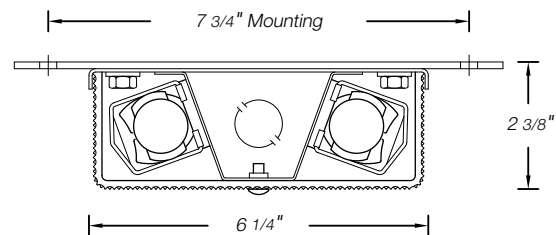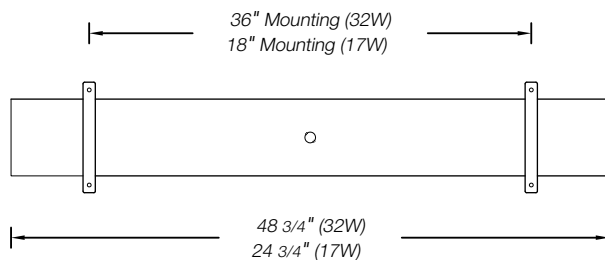



1 Lamp type

17	<i>17W T8, (2 ft)</i>
32	<i>32W T8, (4 ft)</i>