

M208 Series

Surface Mount Low Profile Luminaire Fluorescent Light Fixture

Designed and constructed for commercial marine/wet location surface mount ceiling applications. The design is dripproof, yet easy to install and service. Constructed from marine grade aluminum with a prismatic polycarbonate lens.



M208 Series

Specifications

HOUSING: One piece, low profile, aluminum housing.

LENS: One piece 5/32" prismatic polycarbonate lens.

LAMPS: Two T8 Fluorescent lamps with lamp locks.

FINISH: White, powdercoat polyester, inside and out, phosphate pretreated to ensure superior adhesion and rust resistance.

BALLAST: Standard 120 Volt, HPF. For modifications to voltage and ballast type consult the factory.

WARRANTY: 5 years against defective material and workmanship. Ballast warranted by manufacturer.

DIMENSIONS: Dimensions and specifications subject to change without notification.

Weight: 2' Units = 6 Lbs. (2.7 kg)

4' Units = 8.75 Lbs. (4 kg)

Applications

- **Surface Mount**
- **Narrow Housing**
- **Passageway**
- **Work Stations**

Dripproof fixture


U.L. 1598A Marine

U.S.C.G. - ABS

Available in 2 or 4 foot length

2 T8 lamps

Modifications are available to suit custom requirements

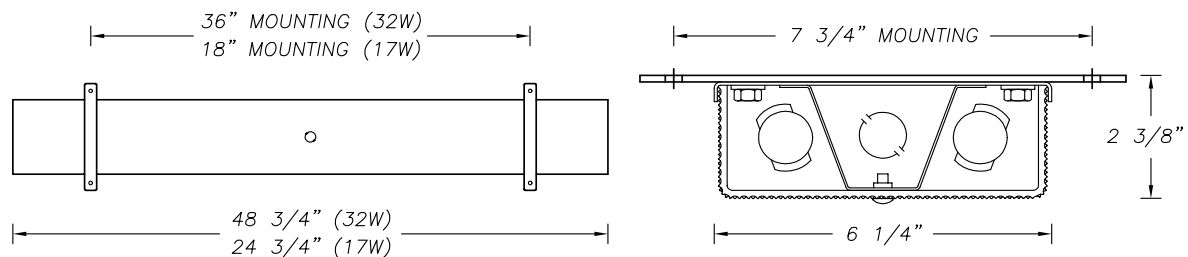

How To Order Example: M208-32.

