

US NAVY MIL SPEC LIGHTING

MIL-F-16377/49


Detail Lighting

The L.C. Doane Company

21 Series, Explosion Proof/Watertight

A portable fluorescent extension light fixture. The housing is marine grade cast aluminum and 1/4" thick cast acrylic. Supplied with 50 feet of 16/3 cable which will accommodate a 150 lb. load. The fixture is capable of operating in an ambient temperature of 135° F and is suitable for Class 1, Group D, hazardous locations as defined by the National Electrical Code.

8W, 115 volts, 60 Hertz.

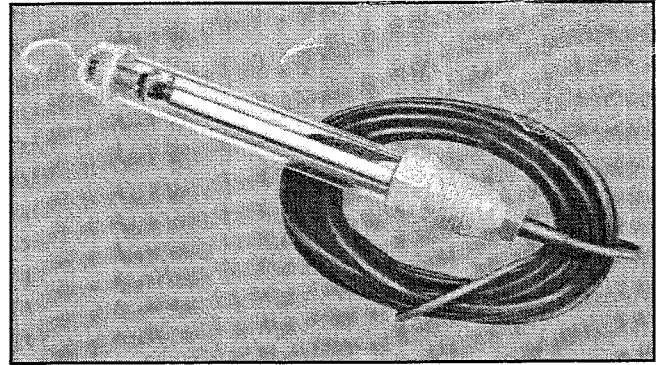

M16377/49-306.2

NSN 6230-00-244-3996

Overall Dimensions: 22-3/4" long X 3" diameter approximately.

Net Weight: 10 lbs. 0 oz. maximum.

Approximate shipping weight for package of six: 65 lbs

How To Order By Military Spec Number

Example: M16377/49-306.2 (Refer to the Index pages for crosses to NSN numbers)

M16377/49-306.2

MIL SPEC
NUMBER

6230-00-244-3996

NSN

On Board Repair Parts For MIL-F-16377/49-306.2 Fixtures

For other available on board repair parts refer to the Repair Parts page.

ITEM DESCRIPTION	L.C. DOANE PART NUMBER	MILITARY NUMBER	NSN NUMBER
GLOBE ASSEMBLY	B-1516-S	M16377/49-001	6230-00-451-6450
HOOK ASSEMBLY	B-1518-S	M16377/49-002	
HANDLE ASSEMBLY	B-1522-S	M16377/49-003	
BUSHING	P-1177-S	M16377/49-004	



THE L.C. DOANE COMPANY DESIGNERS AND MANUFACTURERS OF SPECIALIZED LIGHTING EQUIPMENT
P.O. Box 975 • Essex, CT 06426 • (860) 767-8295 • Fax (860) 767-1397 • Web Site: www.lcdoane.com