

**intent**

The 200 series is designed for general purpose lighting in high abuse environments.

mounting

Surface mounts to ceilings and walls.

lens

A single, vandal resistant, prismatic, injection molded lens completely encloses the fixture.

housing

Made from 18 gauge steel die formed to shape.

finish



Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance.

hardware

Stainless steel, tamper-proof screws provide luminaire access.

certifications

Available with dry, damp, or wet location UL listing. Wet location fixtures are gasketed with closed cell neoprene.

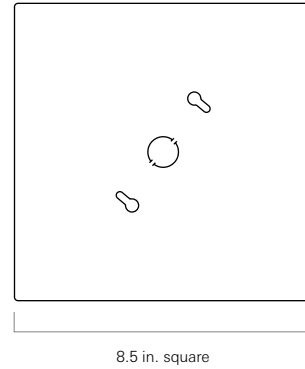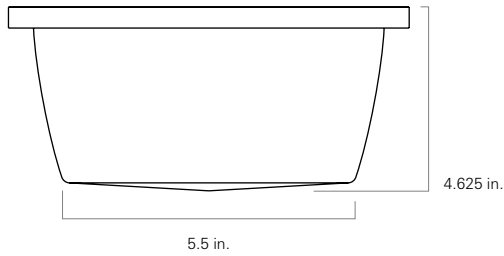

one lamps (not included)

- 09 9 W 6 in. T4 TT
- 13 13 W 7 in. T4 TT
- 13D 13 W 5 in. T4 DTT
- 18D 18 W 6 in. T4 DTT
- 26 26 W 7 in. T4 DTT

two material

- C cold rolled steel
- S stainless steel

three voltage (60 Hz)

- 120 120 V
- 277 277 V
- 347 347 V
- VAR variable, 120-277 V

four ballast

- EL electronic
- HP high power factor
- PH preheat

five lens

- A clear acrylic
- P clear polycarbonate
- OA white acrylic
- OP white polycarbonate

six fasteners

- AP stainless steel allen head with pin
- TP stainless steel torx head with pin
- PH phillips, non security

seven UL listing

- D dry and damp location
- W wet location

eight options

- CU Canadian UL listing
- E1 one lamp emergency service
- FH fuse and holder