

**intent**

The LPN series is designed for general purpose lighting in high abuse environments.

mounting

Surface mounts to ceilings or walls.

lens

Vandal resistant, prismatic, UV stabilized polycarbonate lens.

housing

Made from cold rolled steel die formed to shape with seams welded and ground smooth.

hardware



Stainless steel, tamper-proof screws provide luminaire access.

wiring

All electrical components are mounted to the housing for wiring ease.

certifications

Dry and damp location UL listed. For a wet location fixture of similar design, see our LPS luminaire.

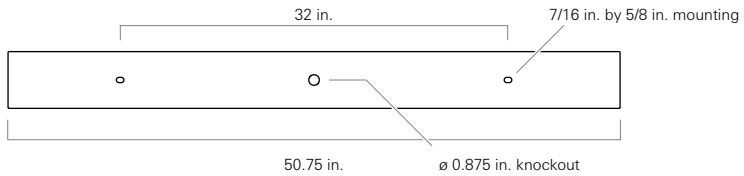

- one lamps (not included)**
 28 4 ft. 28 W T5
 32 4 ft. 32 W T8 RS
 4B two 2 ft. 40W T5 RS biax

- two voltage (60 Hz)**
 120 120 V
 277 277 V
 347 347 V
 VAR variable

- three ballast**
 DM dimming
 EL electronic
 HP high power factor, standard

- four fasteners**
 AP allen head with pin
 TP torx head with pin
 PH phillips, non security

- five finish**
 W white

- six options**
 CU Canadian UL listing
 E1 one lamp emergency service
 FH fuse and holder