

**intent**

The SG series is designed for general purpose lighting in high abuse environments.

mounting

Surface mounts to corners or walls.

housing

Made from sheet steel die formed to shape with seams welded and ground smooth.

door

Outfitted with adjustable, heavy gauge lens retainers.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance. Brushed stainless steel is also available.

hardware


Recessed, stainless steel, tamper-proof screws provide luminaire access.

wiring

All electrical components are reflector mounted for easy wiring and maintenance.

certifications

Available with dry, damp, or wet location UL listing.

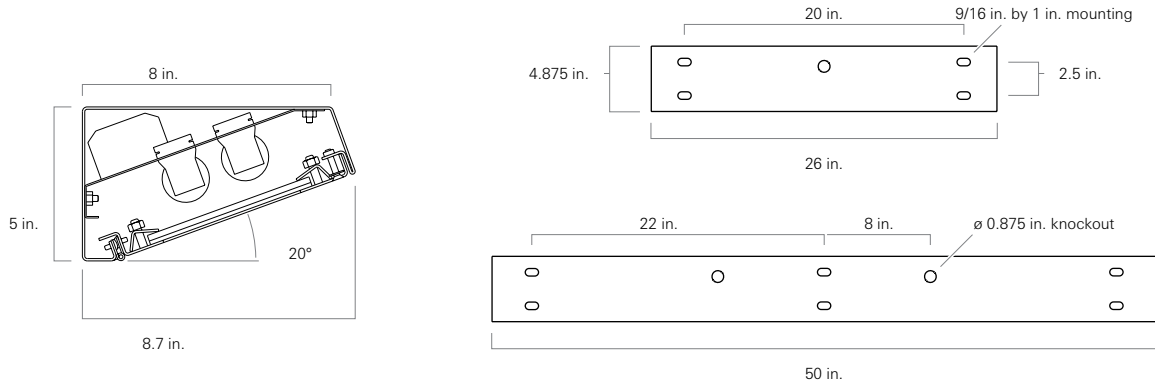

one lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

two lamp quantity

- 1 one
- 2 two

three material gauge

- N 18 gauge, minimum security
- D 16 gauge, medium security
- X 14 gauge, maximum security

four material

- C cold rolled steel
- S stainless steel

five finish

- R brushed, stainless steel only
- W white

six voltage (60 Hz)

- 120 120 V
- 277 277 V
- 347 347 V
- VAR variable, 120-277 V

seven ballast

- DM dimming
- EL electronic
- HO high output
- PR program start
- RS rapid start

eight internal lens

- 53 0.125 in. acrylic K12 prismatic, standard
- 15 0.156 in. polycarbonate K12 prismatic
- 16 0.187 in. polycarbonate K12 prismatic
- 75 0.156 in. tempered glass prismatic
- 01 0.005 in. UV absorbing overlay

nine external lens

- 30 0.187 in. polycarbonate, standard
- 32 0.250 in. polycarbonate
- 36 0.375 in. polycarbonate
- 90 0.187 in. tempered glass
- 92 0.250 in. tempered glass

ten door fasteners

- AP stainless steel allen head with pin
- TP stainless steel torx head with pin
- PH phillips, non security

eleven mounting holes

- D ceiling and wall mounting holes
- W wall mounting holes only



twelve thirteen fourteen

twelve electrical access

- A 2.250 in. diameter access hole
- K 0.875 in. diameter knockout(s), standard

thirteen UL listing

- D dry and damp location
- W wet location

fourteen options

- 2C two circuit wired
- CU Canadian UL listing
- E1 one lamp emergency service
- E2 two lamp emergency service
- FH fuse and holder
- PS security push on/off switch