

**intent**

The SO series is designed for general purpose lighting in high abuse environments.

mounting

Surface mounts to ceilings.

housing

Made from 16 gauge sheet metal die formed to shape with welded seams ground smooth.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance. Brushed stainless steel is also available.

hardware




Recessed, stainless steel, tamper-proof screws provide luminaire access.

wiring

Reflector mounted electrical components for easy wiring and maintenance.

certifications

Available with dry, damp, or wet location UL listing.

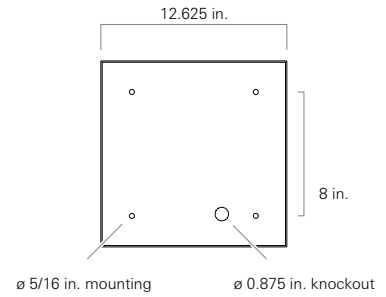

one lamps (not included)

- 07 7 W T4 PL TT
- 09 9 W T4 PL TT
- 13 13 W T4 PL TT
- 13D 13 W T4 PL DTT, only with conduit box option
- 26 26 W T4 PL DTT, only with conduit box option, two lamp maximum

two lamp quantity

- 1 one
- 2 two
- 3 three

three material

- A aluminum
- C cold rolled steel
- S stainless steel

four finish

- R brushed, stainless steel only
- W white

five voltage (60 Hz)

- 120 120 V
- 277 277 V
- 347 347 V
- VAR variable, 120-277 V

six ballast

- EL electronic, only with 13 W DTT and 26 W DTT lamps
- HP high power factor
- PH preheat, only with 7 W and 9 W lamps

seven internal lens

- 53 0.125 in. acrylic K12 prismatic
- 12 0.125 in. polycarbonate K12 prismatic
- 15 0.156 in. polycarbonate K12 prismatic
- 16 0.187 in. polycarbonate K12 prismatic
- 75 0.156 in. tempered glass prismatic
- 01 0.005 in. UV absorbing overlay

eight external lens

- 30 0.187 in. polycarbonate
- 32 0.250 in. polycarbonate
- 36 0.375 in. polycarbonate
- 90 0.187 in. tempered glass
- 92 0.250 in. tempered glass

nine door fasteners

- AP stainless steel allen head with pin
- TP stainless steel torx head with pin
- PH phillips, non security

ten UL listing

- D dry and damp location
- W wet location

eleven options

- CU Canadian UL listing
- E1 one lamp 90 minute battery backup
- FH fuse and holder