



SECURITY / VANDAL RESISTANT



SO SERIES SECURITY SURFACE MOUNTED LUMINAIRE

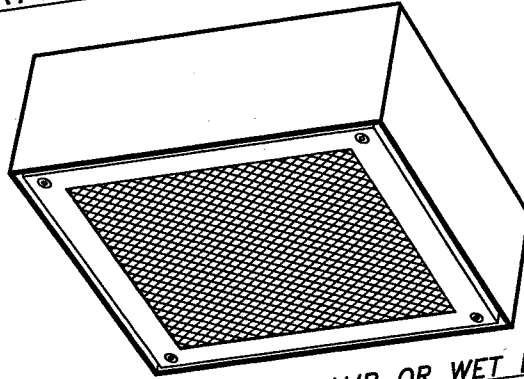

DRY, DAMP OR WET LOCATION U.L. LISTING

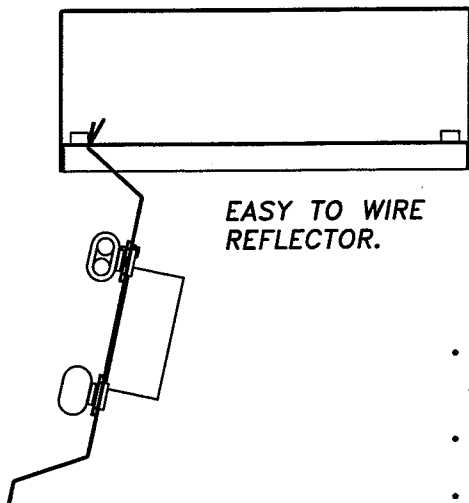

EASY TO WIRE
REFLECTOR.

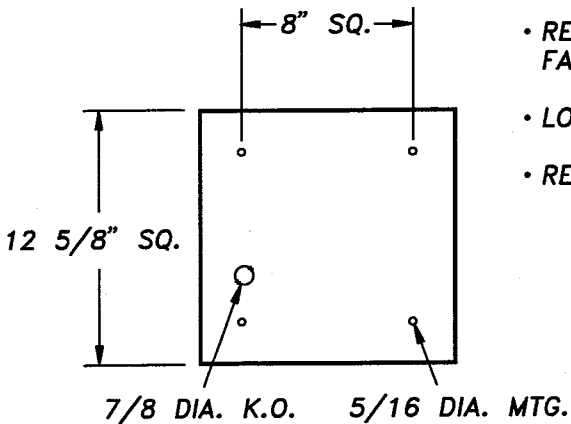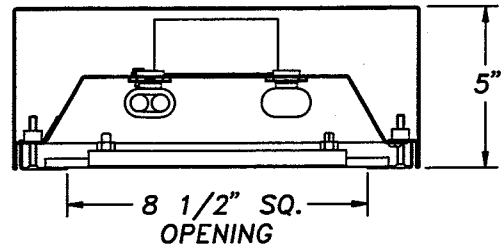

- ONE PIECE DIE FORMED 16 GAUGE HOUSING AND DOOR.
- CONTINUOUSLY WELDED SEAMS GROUND SMOOTH.
- ADJUSTABLE HEAVY GAUGE LENS RETAINERS.
- RECESSED STAINLESS STEEL TAMPERPROOF FASTENERS.
- LOW PROFILE, LARGE WINDOW DESIGN.
- REFLECTOR MOUNTED ELECTRICAL COMPONENTS.



THE L.G. DOANE COMPANY DESIGNERS AND MANUFACTURERS OF SPECIALIZED LIGHTING EQUIPMENT
P.O. Box 975 • Essex, CT 06426 • (860) 767-8295 • Fax (860) 767-1397 • Web Site: www.lcdoane.com

SECURITY / VANDAL RESISTANT

EXAMPLE: SO132-CW-120HP-53/32-APD

SO			-			-		/		-			
CHART	1	2	3	4	5	6	7	8	9	10	OPTIONS		

CHART 1 PL LAMPS	
07	7W T4 TT
09	9W T4 TT
13	13W T4 TT
13D	13W T4 DTT
26	26W T4 DTT * (2 MAXIMUM)

CHART 7 INTERNAL LENS	
53	.125 ACRYLIC K12 PRISM.
15	.156 POLYCARB. K12 PRISM.
16	.187 POLYCARB. K12 PRISM.
75	.156 TEMPERED GLASS PRISM.
01	.005 UV ABSORBING OVERLAY

CHART 2 LAMP QTY.		
1	2	3
LAMPS NOT INCLUDED		

CHART 8 EXTERNAL LENS	
30	.187 POLYCARBONATE
32	.250 POLYCARBONATE
36	.375 POLYCARBONATE
90	.187 TEMPERED GLASS
92	.250 TEMPERED GLASS

CHART 3 MATERIAL SPEC.	
C	COLD ROLLED STEEL
S	STAINLESS STEEL
A	ALUMINUM

CHART 9 DOOR FASTENERS	
AP	ALLEN HEAD W/PIN, STAINLESS STEEL
TP	TORX HEAD W/PIN, STAINLESS STEEL
PH	PHILLIPS (NON SECURITY)

CHART 4 FINISH	
W	WHITE
R	BRUSHED, STAINLESS ONLY

CHART 10 U.L. LISTING	
D	DAMP & DRY LOCATION
W	WET LOCATION

CHART 5 VOLTAGE (60 Hz.)		
120	277	347

CHART 6 BALLAST	
PH	PREHEAT (STANDARD)
EL	ELECTRONIC *
HP	HIGH POWER FACTOR

OPTIONS	
E1	ONE LAMP 90 MIN. BATTERY BACKUP
FH	FUSE AND HOLDER
CU	CANADIAN U.L. LISTED

* ELECTRONIC BALLASTS AVAILABLE FOR 13 & 26 WATT DTT LAMPS ONLY.

DIMENSIONS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION.

MODIFICATIONS ARE AVAILABLE TO SUIT CUSTOM REQUIREMENTS.

