

intent

The STP series is designed for step and detail lighting in high abuse environments.

mounting

Mounts recessed in steps or walls.

housing

Made from sheet steel die formed to shape.

door

Made from 18 gauge sheet aluminum, cold rolled steel, or stainless steel.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance. Brushed stainless steel is also available.

hardware



Stainless steel, tamper-proof screws provide luminaire access. A mounting bracket and mounting screws are provided.

wiring


All electrical components are mounted to a removable wireway for easy wiring.

certifications

Wet location UL listed.

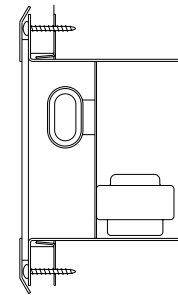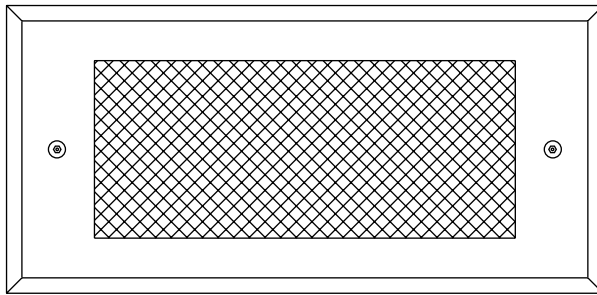


louvered door option

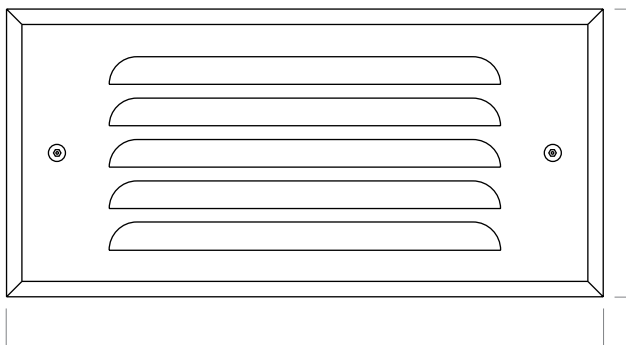

6.5 in.

13.5 in.

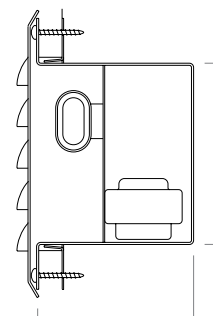

4.125 in.

3.5 in.



one lamps (not included)

- 05 5 W 4 in. T4 TT
- 07 7 W 5 in. T4 TT
- 09 9 W 6 in. T4 TT
- 13 13 W 7 in. T4 TT, standard

two material

- A aluminum
- C cold rolled steel, standard
- S stainless steel

three finish

- R brushed, stainless steel only
- W white, standard

four voltage (60 Hz)

- 120 120 V
- 277 277 V
- 347 347 V
- VAR variable, 127-277 V

five ballast

- CO core & coil, standard
- HP high power factor

six lens

- 52 0.125 in. white acrylic
- 53 0.125 in. prismatic acrylic
- 12 0.125 in. prismatic polycarbonate
- 00 none, only with louvered door option

seven fasteners

- AP stainless steel allen head with pin
- TP stainless steel torx head with pin
- PH phillips, non security

eight options

- CU Canadian UL listing
- EM emergency battery power
- LD louvered door