



intent

The TUSS series is designed for general purpose lighting for high abuse environments. Its low profile, large window design maximizes light output while minimizing space requirements.

mounting

Surface mounts to ceilings. Its embossed mounting holes create a contraband trapping space between its backplate and mounting surface.

housing

Made from sheet steel die formed to shape with seams welded and ground smooth.

door

Clamshell door with adjustable, heavy gauge lens retainers and a full length piano hinge with welded pin.

finish




Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance. Brushed stainless steel is also available.

hardware

Recessed, stainless steel tamper-proof screws provide luminaire access.

certifications

Available with dry, damp, or wet location UL listing.

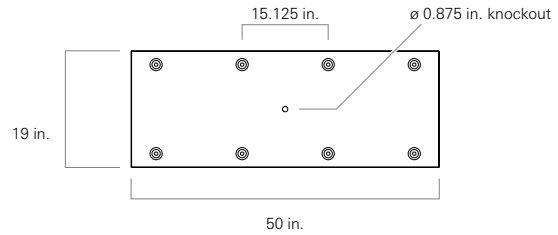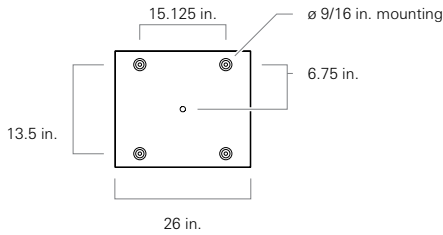

one lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 RS biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

two lamp quantity

- 2 two
- 4 four

three door gauge

- N 18 gauge, minimum security
- D 16 gauge, medium security
- X 14 gauge, maximum security

four door material

- C cold rolled steel
- S stainless steel

five finish

- R brushed, stainless steel only
- W white

six voltage (60 Hz)

- 120 120 V
- 277 277 V
- 347 347 V
- VAR variable, 120-277 V

seven ballast

- DM dimming
- EL electronic
- ES energy saving
- HO high output
- LT low temperature

eight internal lens

- 53 0.125 in. acrylic K12 prismatic, standard
- 15 0.156 in. polycarbonate K12 prismatic
- 16 0.187 in. polycarbonate K12 prismatic
- 75 0.156 in. tempered glass prismatic
- 01 0.005 UV absorbing overlay

nine external lens

- 30 0.187 in. polycarbonate, standard
- 32 0.250 in. polycarbonate
- 36 0.375 in. polycarbonate
- 90 0.187 in. tempered glass
- 92 0.250 in. tempered glass

ten door fasteners

- AP stainless steel allen head with pin
- TP stainless steel torx head with pin
- PH phillips, non security

eleven UL listing

- D dry and damp location
- W wet location

twelve options

- 2C two circuit wired
- CU Canadian UL listing
- E1 one lamp emergency service
- E2 two lamp emergency service
- FH fuse and holder
- NL night light, for 7 or 9 W PL bi-pin
- NL-LED night light, LED