**intent**

The UCF series is designed for under cabinet lighting in high abuse environments.

mounting

Surface mounts underneath cabinets. Knockouts on both ends permit continuous fixture mounting.

light source

Two T5 fluorescent lamps powered by slim electronic ballasts.

lens

5/32 in. Thick prismatic polycarbonate lens.

housing

Made from sheet metal die formed to shape.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance.

Brushed stainless steel is also available.

hardware



Stainless steel tamper-proof screws provide luminaire access.

wiring

A removable access channel allows for easy wiring.

certifications

Available with dry, damp, or wet location UL listing.

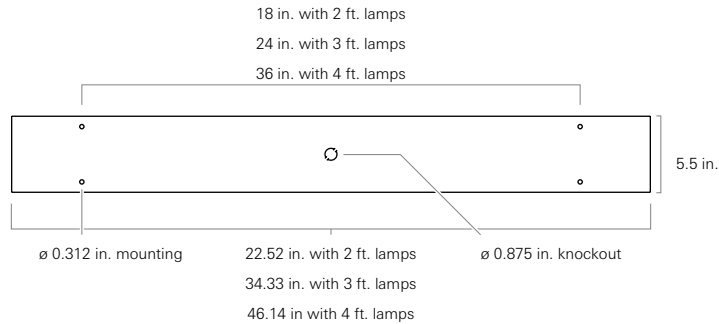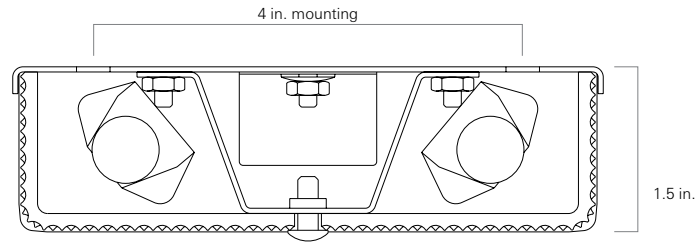

- one lamps (not included)**
14 2 ft. 14 W T5 RS
21 3 ft. 21 W T5 RS
28 4 ft. 28 W T5 RS
54 4 ft. 54 W T5 HO

- two material**
A aluminum
C cold rolled steel, standard
S stainless steel

- three finish**
R brushed, stainless steel only
W white

- four voltage (60 Hz)**
120 120 V
277 277 V
347 347 V
VAR variable, 120-277 V

- five fasteners**
AP stainless steel allen head with pin
TP stainless steel torx head with pin
PH phillips, non security

- six UL listing**
D dry and damp location
W wet location

- seven options**
2C two circuit wired
CU Canadian UL listing
FH fuse and holder
LL lamp locks