

**intent**

The UCF8 series is designed for under cabinet lighting in high abuse environments.

mounting

Surface mounts underneath cabinets. Knockouts on both ends permit continuous fixture mounting.

light source

Two T8 fluorescent lamps with lamp locks.

lens

5/32 in. Thick prismatic polycarbonate lens.

housing

Made from sheet metal die formed to shape.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance.

Brushed stainless steel is also available.

hardware



Stainless steel screws provide luminaire access.

wiring

A removable access channel allows for easy wiring.

certifications

Available with dry, damp, or wet location UL listing.

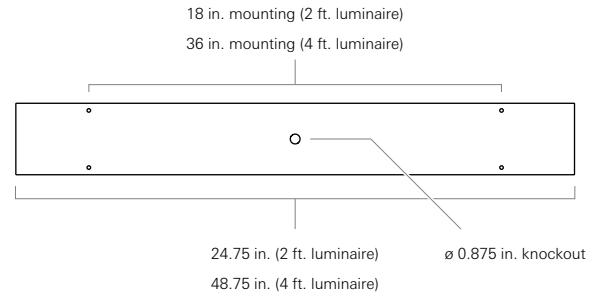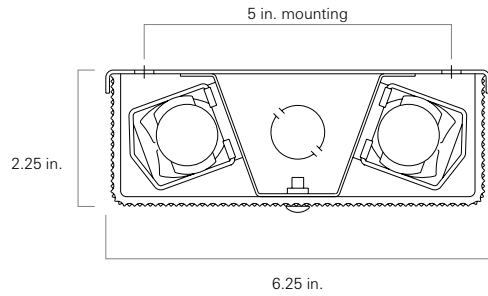

one lamps (not included)

- 17 2 ft. 17 W T8
- 32 4 ft. 32 W T8

two material

- A aluminum
- C cold rolled steel, standard
- S stainless steel

three finish

- R brushed, stainless steel only
- W white

four voltage (60 Hz)

- 120 120 V
- 277 277 V
- 347 347 V
- VAR variable, 120-277 V

five fasteners

- PH phillips head, standard
- TH thumb screw
- TP torx head with pin

six UL listing

- D dry and damp location
- W wet location

seven options

- 2C two circuit wired
- CU Canadian UL listing
- FH fuse and holder