

**intent**

The USS series is designed for general purpose lighting in high abuse environments. Its low profile, large window design maximizes light output and minimizes space requirements.

mounting

Surface mounts to ceilings. Its embossed mounting holes create a contraband trapping space between its backplate and mounting surface.

housing

Clamshell housing made from sheet steel die formed to shape with continuously welded seams.

door

Outfitted with adjustable, heavy gauge lens retainers and a full length piano hinge with welded pin.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance. Brushed stainless steel is also available.

hardware


Recessed, stainless steel, tamper-proof screws provide luminaire access.

wiring

Reflector mounted electrical components for easy wiring and maintenance.

certifications

Available with dry, damp, or wet location UL listing.

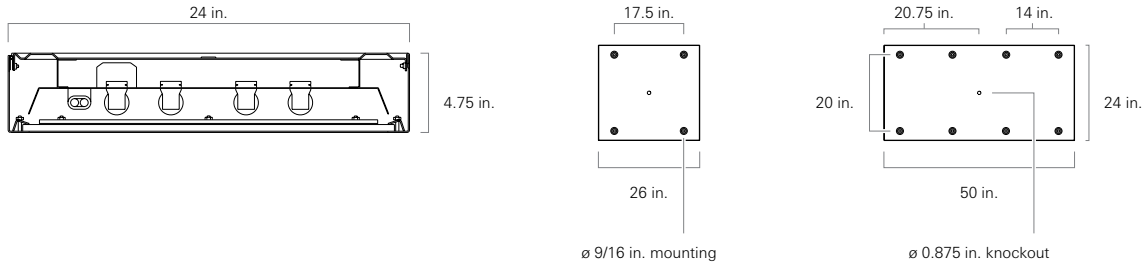

one	lamps (not included)	six	voltage (60 Hz)
14	2 ft. 14 W T5	120	120 V
17	2 ft. 17 W T8	277	277 V
24	2 ft. 24 W T5 HO	347	347 V
3U	2 ft. 32 W T8 RS 6 in. U	VAR	variable, 120-277 V
4B	2 ft. 40 W T5 RS biaxial		
28	4 ft. 28 W T5	seven	ballast
32	4 ft. 32 W T8	DM	dimming
54	4 ft. 54 W T5 HO	EL	electronic
		HO	high output
		PR	program start
		RS	rapid start
two	lamp quantity	eight	internal lens
1	one	53	0.125 in. acrylic K12 prismatic, <u>standard</u>
2	two	15	0.156 in. polycarbonate K12 prismatic
3	three	16	0.187 in. polycarbonate K12 prismatic
4	four	75	0.156 in. tempered glass prismatic
		01	0.005 in. UV absorbing overlay
three	door gauge	nine	external lens
N	18 gauge, minimum	30	0.187 in. polycarbonate, <u>standard</u>
D	16 gauge, medium security	32	0.250 in. polycarbonate
X	14 gauge, maximum security	36	0.375 in. polycarbonate
U	12 gauge, ultra maximum security	90	0.187 in. tempered glass
		92	0.250 in. tempered glass
four	door material	ten	fasteners
C	cold rolled steel	AP	stainless steel allen head with pin
S	stainless steel	TP	stainless steel torx head with pin
		PH	phillips, non security
five	finish		
R	brushed, <u>stainless steel only</u>		
W	white		



eleven	electrical access
A	2.250 in. diameter access hole
K	0.875 in. diameter knockout(s), <u>standard</u>
twelve	UL listing
D	dry and damp location
W	wet location
thirteen	options
2C	two circuit wired
CU	Canadian UL listing
E1	one lamp emergency service
E2	two lamp emergency service
FH	fuse and holder
NL	night light, for 7 or 9 W PL bi-pin
PS	security push on/off switch