

**intent**

The XT series is designed for high abuse environments. Its drop in exit stencil includes pop-out arrows.

mounting

Surface mounts to ceilings or walls via a mounting canopy.

light source

Supplied with two compact fluorescent 7 W lamps.

lens

0.25 in. Polycarbonate lens secured on all sides.

housing

Made from 14 gauge steel die formed to shape with seams welded and ground smooth.

finish

Polyester powder coated after phosphate treatment for superior adhesion and corrosion resistance. Brushed stainless steel is also available.

hardware


Recessed, stainless steel, tamper-proof screws provide luminaire access.

emergency power

90 minute emergency powered units include a nickel cadmium battery, two miniature wedge base lamps, and 120/277 dual voltage solid state charger with power indicator lights and test switch.

certifications

Wet location 924 ETL listed. This sign meets or exceeds requirements as established by the national electric code, article 700.

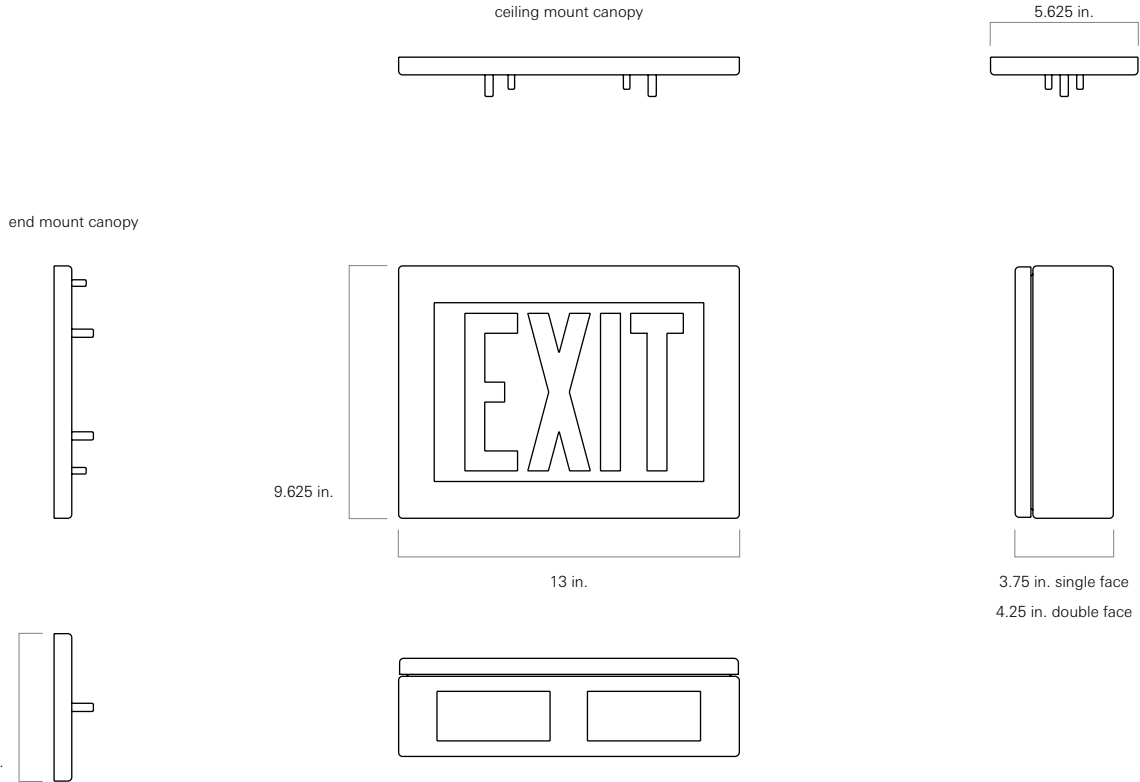

one	material	four	face quantity	seven	fasteners
C	cold rolled steel	S	single face	AP	stainless steel allen head with pin
S	stainless steel	D	double face	TP	stainless steel torx head with pin
two	finish	five	letter color	eight	mounting
R	brushed, stainless steel only	R	red	C	ceiling
W	white	G	green	E	end
				W	wall and surface
three	voltage (60 Hz)	six	lens	nine	options
120	120 V	32	0.250 in. polycarbonate, standard	24F	24 V flashing fire alarm
277	277 V	92	0.250 in. tempered glass	EM	emergency battery power
347	347 V			F	emergency mode flasher
VAR	variable, 120-277 V				