


SECURITY / VANDAL RESISTANT

XT SERIES MAXIMUM SECURITY FLUORESCENT EXIT

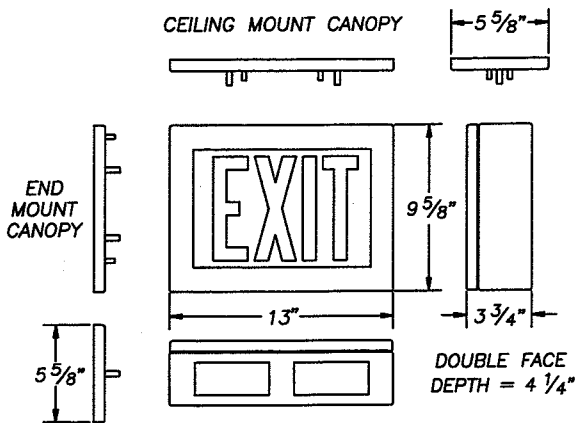

WET LOCATION 924 ETL LISTED

- SUPPLIED WITH TWO COMPACT FLUORESCENT 7 WATT LAMPS.
- 14 GAGE STEEL ENCLOSURE CONTINUOUSLY WELDED AND GROUND SMOOTH.
- UNIVERSAL ENCLOSURE MOUNTING DESIGN WITH INDIVIDUAL FULL LENGTH CANOPIES FOR END AND CEILING MOUNTING.
- FOUR FLUSH HEAD STAINLESS TAMPERPROOF DOOR RETAINING SCREWS.
- 1/4" LEXAN LENS SECURED ON ALL SIDES BY STEEL ANGLES.
- DROP IN EXIT STENCIL FACE WITH POP-OUT DIRECTIONAL ARROWS.
- MEETS OR EXCEEDS REQUIREMENTS AS ESTABLISHED BY THE NATIONAL ELECTRIC CODE, ARTICLE 700.
- 90 MINUTE EMERGENCY POWERED UNITS INCLUDE; NICKEL CADMIUM BATTERY, TWO MINIATURE WEDGE BASE LAMPS, 120/277 DUAL VOLTAGE SOLID STATE CHARGER WITH POWER INDICATOR LIGHTS AND TEST SWITCH.

XT										
CHART	1	2	3	4	5	6	7	8	OPTIONS	

CHART 1 MATERIAL	
C	COLD ROLLED STEEL
S	STAINLESS STEEL

CHART 2 FINISH	
W	WHITE
R	BRUSHED, STAINLESS ONLY

CHART 3 VOLTAGE (60 Hz.)	
120	277

CHART 4 FACE QTY.	
S	SINGLE FACE
D	DOUBLE FACE

CHART 5 LETTER COLOR	
R	RED
G	GREEN

CHART 6 LENS	
32	.250 POLYCARBONATE (STD)
92	.250 TEMPERED GLASS

CHART 7 FASTENERS	
AP	ALLEN W/PIN, S.S.
TP	TORX W/PIN, S.S.

CHART 8 MOUNTING	
W	WALL (SURFACE) MOUNTED
C	CEILING MOUNTING
E	END MOUNTED

OPTIONS	
EM	EMERGENCY BATTERY POWER
24F	24V FLASHING FIRE ALARM
F	EMERGENCY MODE FLASHER


DIMENSIONS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION.



THE L.C. DOANE COMPANY DESIGNERS AND MANUFACTURERS OF SPECIALIZED LIGHTING EQUIPMENT
P.O. Box 975 • Essex, CT 06426 • (860) 767-8295 • Fax (860) 767-1397 • Web Site: www.lcdoane.com

SECURITY / VANDAL RESISTANT

XTL SERIES MAXIMUM SECURITY L.E.D. EXIT

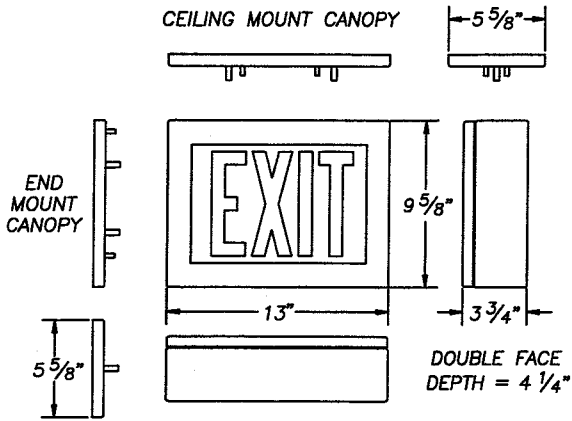

WET LOCATION 924 ETL LISTED

- FULL EXIT ILLUMINATION PROVIDED BY PARALLEL WIRED HIGH OUTPUT L.E.D. PANEL.
- 14 GAGE STEEL ENCLOSURE CONTINUOUSLY WELDED AND GROUND SMOOTH.
- UNIVERSAL ENCLOSURE MOUNTING DESIGN WITH INDIVIDUAL FULL LENGTH CANOPIES FOR END AND CEILING MOUNTING.
- FOUR FLUSH HEAD STAINLESS TAMPERPROOF DOOR RETAINING SCREWS.
- 1/4" LEXAN LENS SECURED ON ALL SIDES BY STEEL ANGLES.
- DROP IN EXIT STENCIL FACE WITH POP-OUT DIRECTIONAL ARROWS.
- MEETS OR EXCEEDS REQUIREMENTS AS ESTABLISHED BY THE NATIONAL ELECTRICAL CODE, ARTICLE 700.
- 90 MINUTE EMERGENCY POWERED UNITS INCLUDE; NICKEL CADMIUM BATTERY, 120/277 DUAL VOLTAGE CHARGER, POWER INDICATOR LIGHT AND TEST SWITCH.

XTL	-								
CHART	1	2	3	4	5	6	7	OPTIONS	

CHART 1 MATERIAL	
C	COLD ROLLED STEEL
S	STAINLESS STEEL

CHART 2 FINISH	
W	WHITE
R	BRUSHED, STAINLESS ONLY

CHART 3 FACE QTY.	
S	SINGLE FACE
D	DOUBLE FACE

CHART 4 LETTER COLOR	
R	RED
G	GREEN

CHART 5 LENS	
32	.250 POLYCARBONATE (STD)
92	.250 TEMPERED GLASS

CHART 6 FASTENERS	
AP	ALLEN W/PIN, S.S.
TP	TORX W/PIN, S.S.

CHART 7 MOUNTING	
W	WALL (SURFACE) MOUNTED
C	CEILING MOUNTING
E	END MOUNTED

OPTIONS	
EM	EMERGENCY BATTERY POWER

DIMENSIONS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION.



THE L.C. DOANE COMPANY DESIGNERS AND MANUFACTURERS OF SPECIALIZED LIGHTING EQUIPMENT
P.O. Box 975 • Essex, CT 06426 • (860) 767-8295 • Fax (860) 767-1397 • Web Site: www.lcdoane.com