**intent**

The FTD series is designed for dust free operation in cleanroom environments.

mounting

Surface mounts to ceilings.

lens

Snap in extruded acrylic lens.

housing


Made from sheet steel die formed to shape with seams welded and ground smooth.

finish

Polyester powder coated after phosphate pre-treatment for superior adhesion and corrosion resistance.

certifications

Wet location UL listing.

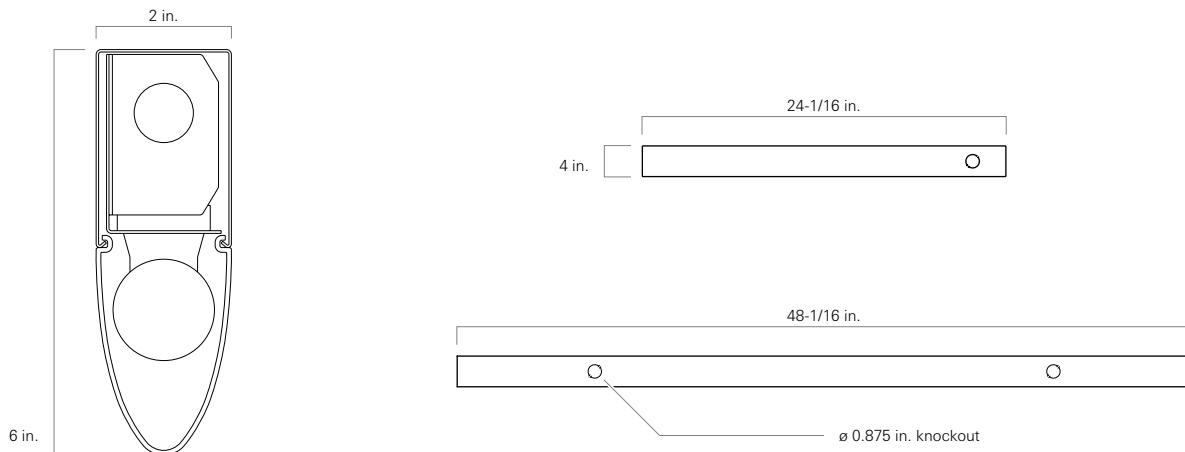

one lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

two lens

- CL clear diffuser
- WH white diffuser

three material

- C cold rolled steel
- S stainless steel

four finish

- R brushed, stainless steel only
- W white

five voltage (60 Hz)

- 120 120 V
- 277 277 V
- 347 347 V
- VAR variable, 120-277 V

six ballast

- DM dimming
- EL electronic
- HO high output
- PR program start
- RS rapid start

seven options

- CU Canadian UL listing
- E1 one lamp emergency service
- FH fuse and holder