

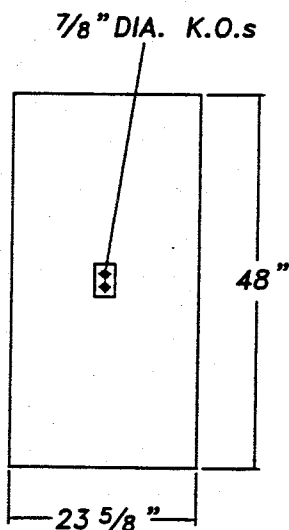


SPECIAL APPLICATION

RXB SERIES CLEAN ROOM RECESSED "T" GRID LUMINAIRE

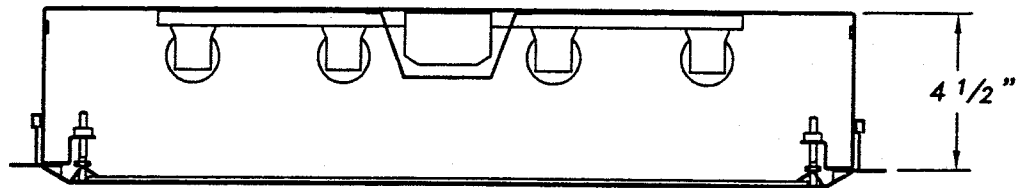

- DESIGNED FOR 1" THROUGH 1 1/2" T, GRID CEILINGS.
- HOUSING CONSTRUCTED OF DIE FORMED 18 GAUGE STEEL WITH 20 GAUGE WELDED ENDS.
- ADJUSTABLE FULL LENGTH LENS RETAINERS.
- STAINLESS STEEL FASTENERS.
- GASKETED SEAMLESS DOOR PREVENTS CONTAMINATING AIR FLOW.
- CABLE FASTENERS PROVIDE ADDITIONAL SUPPORT IN EARTHQUAKE PRONE AREAS.
- "FREEDOM HINGE" PERMITS TOOLESS DOOR REMOVAL AND HANGS FROM EITHER HOUSING SIDE.

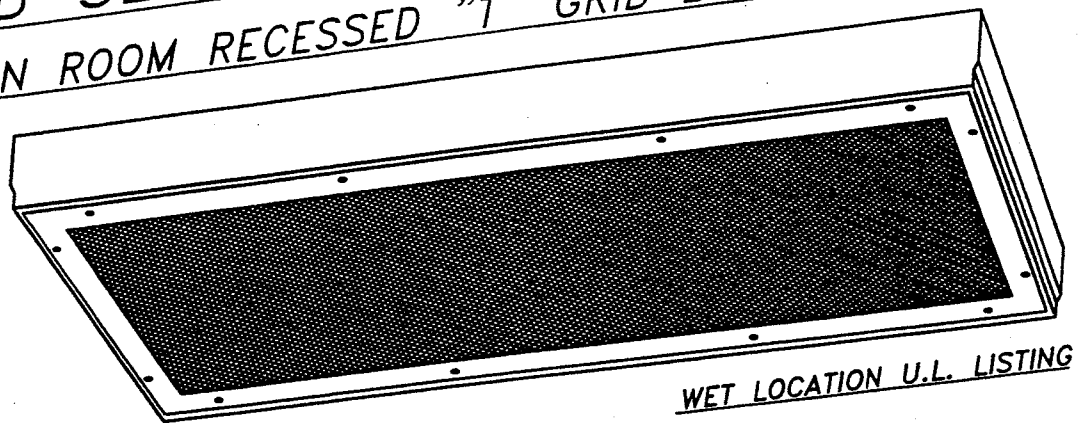

THE L.C. DOANE COMPANY DESIGNERS AND MANUFACTURERS OF SPECIALIZED LIGHTING EQUIPMENT
P.O. Box 975 • Essex, CT 06426 • (860) 767-8295 • Fax (860) 767-1397 • Web Site: www.lcdoane.com

SPECIAL APPLICATION

EXAMPLE: RXB-4/32E-120-CW53-FH

RXB	-		/			-		-		-		-		-	
CHART	1	2	3	4	5	6	7	OPTIONS							

CHART 1 LAMP QTY.

2	4	6
----------	----------	----------

LAMPS NOT INCLUDED

CHART 5 DOOR MATERIAL

C	COLD ROLLED STEEL
S	STAINLESS STEEL
A	ALUMINUM

CHART 2 LAMPS

17	17W RS 2' T8
20	20W PH 2' T12
32	32W RS 4' T8
40	40W RS 4' T12
4B	40W RS 2' T5 BIAx

CHART 6 DOOR FINISH

W	WHITE
R	BRUSHED, STAINLESS ONLY

CHART 3 BALLAST

S	ENERGY SAVING
E	ELECTRONIC
D	DIMMING
L	LOW TEMPERATURE

CHART 7 LENSES

53	.125 ACRYLIC K12 PRISMATIC (STD)
12	.125 POLYCARB. K12 PRISMATIC
15	.156 POLYCARB. K12 PRISMATIC

CHART 4 VOLTAGE (60 Hz.)

120	277	347
------------	------------	------------

OPTIONS

E1	ONE LAMP EMERGENCY SERVICE
E2	TWO LAMP EMERGENCY SERVICE
FH	FUSE AND HOLDER

DIMENSIONS AND SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION.

MODIFICATIONS ARE AVAILABLE TO SUIT CUSTOM REQUIREMENTS.

