



XT

Security Exit Surface Mount Fluorescent Ceiling or Wall

PRODUCT SPECIFICATION

The XT series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface wall mount or mounting canopy for ceiling and end mount.

Light Source

Supplied with two compact fluorescent 7 W lamps.

Lens

.250 in clear polycarbonate or clear tempered glass. Drop in exit stencil includes pop-out arrows.

Housing

14 gauge die-formed cold rolled steel with seams welded and ground smooth. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware


Recessed, stainless steel, tamper-proof fasteners.

Emergency Power

Emergency units include a nickel-cadmium battery, two miniature wedge base lamps, and 120/277 dual voltage solid state charger with power indicator lights and test switch.

Certifications

ETL Listed 924 wet location, meets or exceeds NEC article 700 requirements.

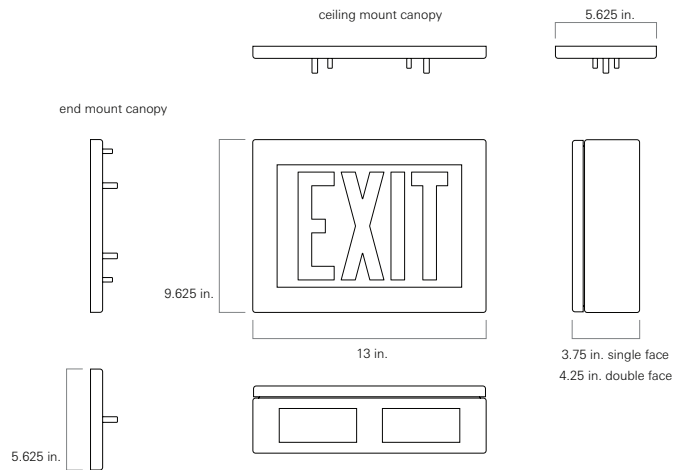

one	Material	four	Face Quantity	seven	Fasteners
C	Cold rolled steel	S	Single face	AP	Stainless steel allen head with pin
S	Stainless steel	D	Double face	TP	Stainless steel torx head with pin
two	Finish	five	Letter Color	eight	Mounting
R	Brushed stainless steel	R	Red	C	Ceiling
W	White	G	Green	E	End
				W	Wall and Surface
three	Voltage	six	Lens	nine	Options
120	120 V	32	.250 in clear polycarbonate	CU	Canadian UL Listing
277	277 V	92	.250 in clear tempered glass	EM	Emergency battery power
				F	Emergency mode flasher with battery power

Modifications are available to meet custom requirements.