



PRODUCT SPECIFICATION

The DS1 series is a unique corner mounted fixture designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface mounts to wall or ceiling corner.

Lens

One piece prismatic polycarbonate, formed to a seamless wraparound shape to maximize light dispersion.

Clamshell Housing

14 gauge cold rolled steel die-formed to shape with seams welded and ground smooth, 14 gauge lens retainers and a full length, welded pin piano hinge. Stainless steel available.

Back Plate

16 gauge die-formed cold rolled steel.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Recessed, stainless steel, tamper-proof fasteners.

Certifications



UL Listed damp location.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

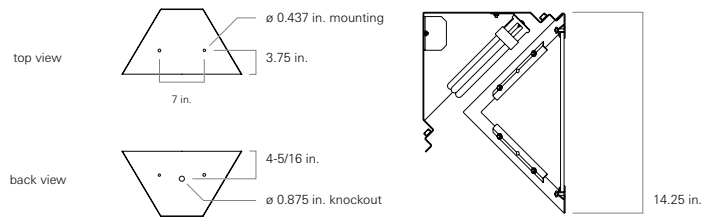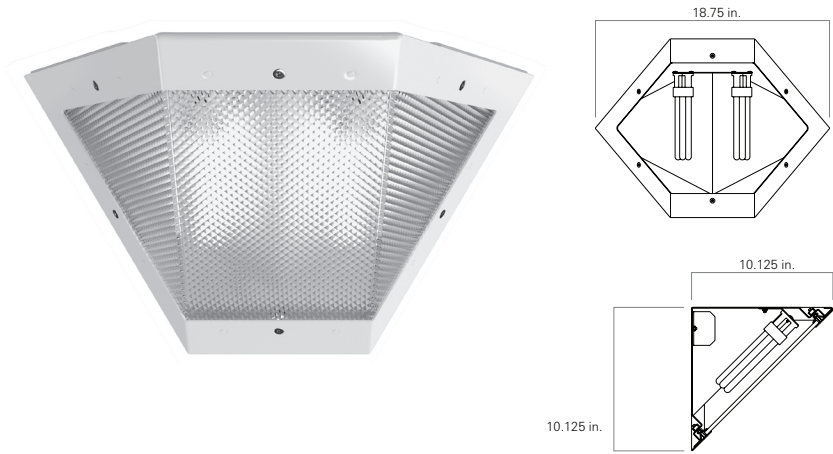

one Lamps (not included)
 13D 13 W 5 in. PL T4 DTT
 18D 18 W 6 in. PL T4 DTT
 26 26 W 7 in. PL T4 DTT

two Housing Material
 C Cold rolled steel
 S Stainless steel

three Housing Finish
 R Brushed stainless steel
 W White

four Voltage
 120 120 V, 60 Hz
 277 277 V, 60 Hz
 347 347 V, 60 Hz
 VAR Variable, 120-277 V, 50/60Hz

five Ballast
 EL Electronic High Power Factor

six Lens
 15 .156 in. K12 prismatic polycarbonate
 16 .187 in. K12 prismatic polycarbonate
 18 .250 in K12 prismatic polycarbonate

seven Door Fasteners
 AP Stainless steel allen head with pin
 TP Stainless steel torx head with pin
 PH Phillips, non-security

eight Options
 CU Canadian UL Listing
 FH Fuse and holder
 SR Specular reflector

Modifications are available to meet custom requirements.