



PRODUCT SPECIFICATION

The LPS series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to ceilings or walls.

Lens

Vandal resistant, injection molded, UV stabilized, prismatic polycarbonate lens.

Housing

Cold rolled steel die formed to shape with seams welded and ground smooth. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Stainless steel, tamper-proof fasteners.

Wiring

All electrical components are mounted to a removable reflector with thumb screw access for easy wiring and maintenance.

Certifications

UL Listed wet location. Covered ceilings only. IP65 rated

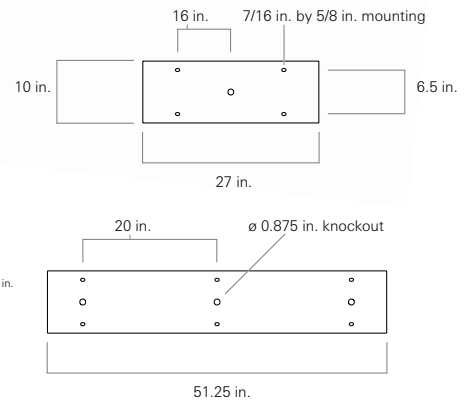
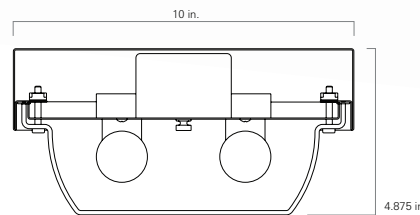
Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

**one Lamps (not included)**

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 RS Biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

two Lamp Quantity

- 2 Two
- 3 Three

three Material

- C Cold rolled steel
- S Stainless steel

four Finish

- W White
- R Brushed stainless steel

five Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

six Ballast

- DM Dimming
- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

seven Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

eight Electrical Access

- A 2.250 in. diameter access hole
- K 0.875 in. diameter knockout(s), std

nine UL Listing

- W Wet location, IP65, ceiling mount
- H Wet location, IP65, horizontal wall mount

ten Options

- 2C Two-circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- FH Fuse and holder
- NL Night light, for 7 or 9 W PL bipin
- NL-LED Night light, LED
- IMS Integral Occ Sensor

Consult factory for aluminum or 14 - 18 gauge CRS and stainless steel.

Modifications are available to meet custom requirements.