



PRODUCT SPECIFICATION

The 200 series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to ceiling or wall.

Lens

Vandal resistant, injection molded, prismatic acrylic or polycarbonate lens completely encloses the back-plate.

Backplate

18 gauge cold rolled steel die-formed to shape. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof fasteners.

Certifications



UL Listed wet location. Covered ceilings only.

Job Name

Fixture Type

Catalog No.

Approval Date

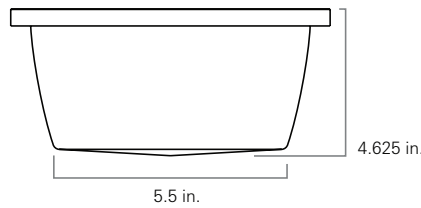

one Lamps (not included)

- 13D 13 W 5 in. T4 DTT
- 18D 18 W 6 in. T4 DTT
- 26 26 W 7 in. T4 DTT

two Material

- C Cold rolled steel
- S Stainless steel

three Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

four Ballast

- EL Electronic

five Lens

- A Clear acrylic
- P Clear polycarbonate
- OA White acrylic
- OP White polycarbonate

six Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

seven UL Listing

- W Wet location

eight Options

- CU Canadian UL Listing
- E1 One lamp emergency ballast
- FH Fuse and holder

Modifications are available to meet custom requirements.