



PRODUCT SPECIFICATION

The CLS is designed for use in industrial and hazardous location environments.

Mounting

Surface mounts to ceilings via shock absorbing mounting brackets.

Lens

.156 in prismatic acrylic, UV stabilized polycarbonate or tempered glass with extruded neoprene gasket.

Housing

18 gauge cold rolled steel die-formed to shape, seam welded and ground smooth. Stainless steel available.

Door

One piece, die-formed 16 gauge cold rolled steel with 'J-Hook' hinge system. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Wiring

Reflector-mounted electrical components for easy wiring and maintenance. Wire entry is provided by a 0.50 in. NPT hazardous location conduit hub.

Certifications




UL 844 Listed. IP54 rated. Class 1 division 2 certified.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

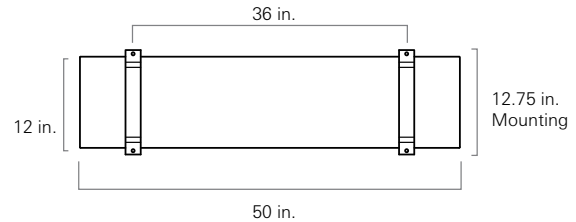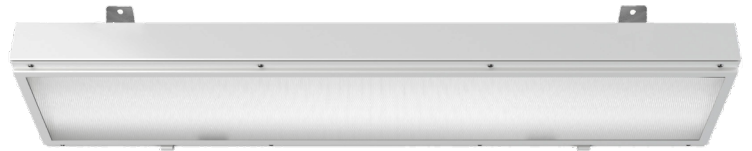

one two three four five six seven eight nine

CLS

one Lamps (not included)

- 17 2 ft. 17 W T8
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO, two lamps only

two Lamp Quantity

- 1 one
- 2 two
- 3 three

three Material

- C Cold rolled steel
- S Stainless steel

four Finish

- R Brushed stainless steel
- W White

five Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

six Ballast

- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

seven Lens

- 15 .156 in. K12 prismatic polycarbonate
- 55 .156 in. K12 prismatic acrylic
- 75 .156 in. C73 prismatic tempered glass

eight Door Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

nine Options

- 2H Two conduit hubs, one each end
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- NL Night light, F8 T5 lamp not included

Modifications are available to meet custom requirements.