



# Overhead Lighting

## 608-LED Series

The 608-LED Series is a dripproof LED lighting fixture for general lighting. The housing is constructed from marine grade aluminum. The fixture is designed for flush mounting in suspended ceilings.

### Power

120 volts, 60Hz.

### Light Source

Three LED arrays, powered by 120V 60 Hz drivers, provide 22.2W 0.19A of solid state illumination.

### Lens

Optic Plus LED diffusing acrylic lens, standard.

### Mounting

Flush mounting in suspended ceilings

### Housing

Marine grade aluminum.

### Cable

Supplied with 10' of LSTHOF-3 cable.  
7XW-3 cable used with emergency circuit option (76).

### Overall Dimensions


23 3/4" X 11 3/4" X 5"

### Certifications

First Article Qualified.



Flush Mount  
M16377/57-348  
NSN 6210-00-115-9186

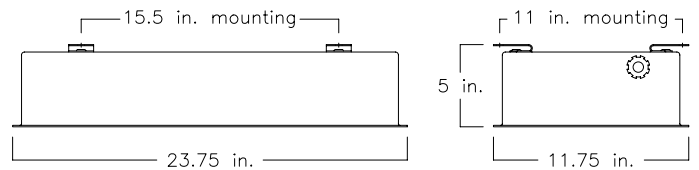

<b>M16377</b>	/	-	-	one
MIL SPEC NUMBER	SLANT	SYMBOL	one	Options
<b>Slant</b>	<b>Mount</b>		<b>one</b>	<b>Options</b>
57	Three LED arrays		E	NEALS battery backup
76	Three LED arrays with NEALS battery backup		R	Single red LED array
			10G	10' LSFHOF-3 ground cable
<b>Symbol</b>	<b>Mount</b>			
348SSL	Flush mount with diffusing acrylic lens			
348EMSSL	349SSL with emergency battery backup			

Replacement Item	L.C. Doane Number	Military Number	NSN
1 Driver & 1 White Array Kit	B-3335A	-	-
Window & Gasket Assembly	B-1537L-SP	-	-
Shockmount	B-1591-BS	M16377/41-008	6210-01-393-4302
NEALS emergency battery pack	P-2860-S	-	-

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.