



PRODUCT SPECIFICATION

The GTO series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Mounts recessed in 1 in. T-grid ceiling. Knockouts for earthquake cable supports provided.

Housing

18 gauge die-formed cold rolled steel with seams welded and ground smooth.

Door

One piece, die formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel door available.

Hardware

Recessed, stainless steel, tamper-proof fasteners.

Wiring

All electrical components are reflector-mounted for easy wiring and maintenance. Access plate with two .875 in. diameter knockouts.

Certifications


UL Listed wet location

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

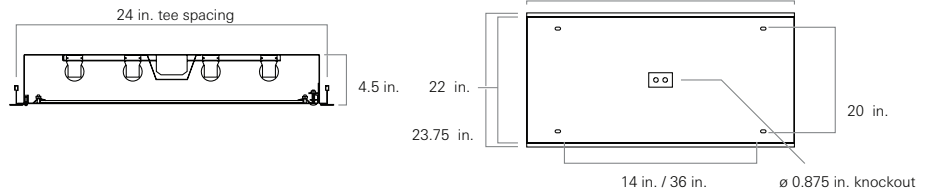

GTO	one	two	three	four	five	six	seven	eight	nine	ten	eleven
-----	-----	-----	-------	------	------	-----	-------	-------	------	-----	--------

- one Lamps (not included)**
 - 14 2 ft. 14 W T5
 - 17 2 ft. 17 W T8
 - 24 2 ft. 24 W T5 HO
 - 4B 2 ft. 40 W T5 RS biax
 - 28 4 ft. 28 W T5
 - 32 4 ft. 32 W T8
 - 54 4 ft. 54 W T5 HO
- two Lamp Quantity**
 - 2 Two
 - 3 Three
 - 4 Four
 - 6 Six
- three Door Gauge**
 - N 18 gauge, minimum security
 - D 16 gauge, medium security
 - X 14 gauge, maximum security
 - U 12 gauge, super max, CRS only
- four Door Material**
 - C Cold rolled steel
 - S Stainless steel

- five Finish**
 - R Brushed stainless steel
 - W White
- six Voltage**
 - 120 120 V, 60 Hz
 - 277 277 V, 60 Hz
 - 347 347 V, 60 Hz
 - VAR Variable, 120-277 V, 50/60Hz
- seven Ballast**
 - DM Dimming
 - EL Electronic Instant Start, std T8
 - PR Program Rapid Start, std T5, option T8
- eight Internal Lens**
 - 53 .125 in. K12 prismatic acrylic
 - 12 .125 in. K12 prismatic polycarbonate
 - 15 .156 in. K12 prismatic polycarbonate
 - 16 .187 in. K12 prismatic polycarbonate
 - 75 .156 in. C73 prismatic tempered glass
 - 01 .005 in. UV absorbing overlay

- nine External Lens**
 - 30 .187 in. clear polycarbonate
 - 32 .250 in. clear polycarbonate
 - 36 .375 in. clear polycarbonate
 - 38 .500 in. clear polycarbonate
 - 90 .187 in. clear tempered glass
 - 92 .250 in. clear tempered glass
 - 96 .375 in. clear tempered glass
- ten Fasteners**
 - AP Stainless steel allen head with pin
 - TP Stainless steel torx head with pin
 - PH Phillips, non-security
- eleven Options**
 - 2C Two-circuit wired
 - CU Canadian UL Listing
 - E1 One lamp emergency ballast
 - E2 Two lamp emergency ballast
 - FH Fuse and holder
 - NL Night light, for 7 or 9 W PL bipin
 - NL-LED Night light, LED
 - OS Occupancy sensor

Consult factory for 14 and 16 gauge CRS and SS housings.

Modifications are available to meet custom requirements.