



PRODUCT SPECIFICATION

The HA series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to ceiling or wall.

Lens

Vandal-resistant, prismatic, injection-molded acrylic or polycarbonate lens.

Backplate, twin tube w/o CB option

18 gauge cold rolled steel die-formed to shape.

Conduit box/housing, required for quad tube

16 gauge cold rolled steel-die formed to shape with seams welded and ground smooth.

Finish



Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof fasteners.

Certifications

UL Listed wet location. Covered ceilings only.

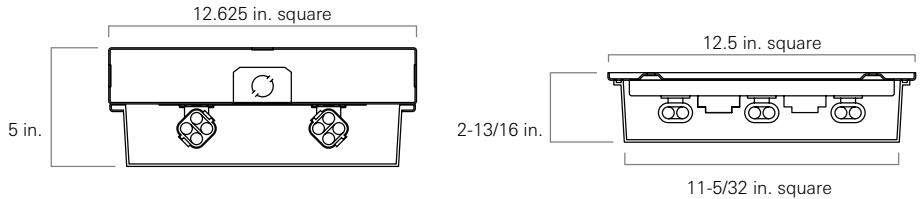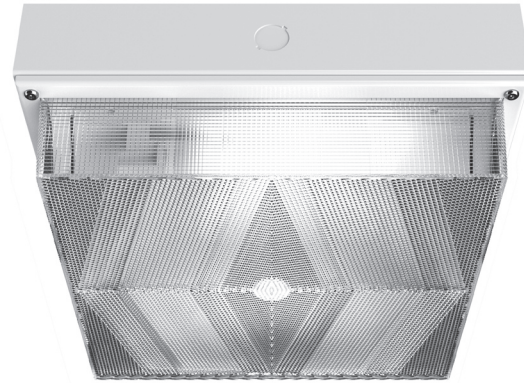

one Lamps (not included)

- 13 13 W T4 TT
13D 13 W T4 DTT, conduit box option required.
26 26 W T4 DTT, conduit box option required.

two Lamp Quantity

- 1 One
2 Two
3 Three

three Voltage

- 120 120 V, 60 Hz
277 277 V, 60 Hz
347 347 V, 60 Hz
VAR Variable, 120-277 V, 50/60Hz

four Ballast

- EL Electronic, std for DTT
HP High Power Factor
PH Preheat, standard for TT

five Finish

- B Black
W White
A Aluminum
Z Bronze

six Fasteners

- AP Stainless steel allen head with pin
TP Stainless steel torx head with pin
PH Phillips, non-security

seven UL Listing

- W Wet location

eight Lens Material

- A Acrylic
P Polycarbonate

nine Options

- CB Conduit Box
CU Canadian UL Listing
E1 One lamp emergency ballast, conduit box option required.
FH Fuse and holder
PC Photo cell, conduit box option required.

Modifications are available to meet custom requirements.