



M100

Marine Surface Mount Ceiling Fluorescent

PRODUCT SPECIFICATION

Overhead Lighting M100 Series

The M100 Series is designed and constructed for commercial marine and wet location surface mount ceiling applications. The design is drip-proof and easy to install and service.

Mounting

Surface-mounts to ceiling.

Housing

Die-formed marine grade aluminum housing with continuously welded seams and liquid tight cord grip.

Lens

Prismatic acrylic.

Lens Frame

Seamless extruded aluminum with piano hinge and spring loaded quarter-turn fasteners.

Finish

White powder coat polyester finish with phosphate pretreatment to ensure superior adhesion.

Ballast

Standard universal 120-277 VAC, 50/60 Hz, electronic ballast.

**Contact factory for other options.*

Weight

4 ft: 20.6 lbs (9.34 kg)

2 ft: 15 lbs (6.8 Kg)

Certifications

IP 54 rated. USCG ABS approved.

UL 1598A marine listed.

Applications



- Narrow Housing
- Passageways
- Work Stations

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

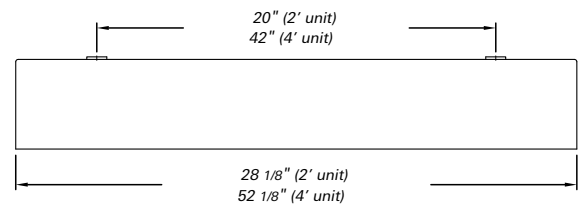

M100	one	two	three
	-	-	-

one	Luminaire Size
2	2-ft fixture
4	4-ft fixture
two	Lamp Type
17	17W T8, (2 ft)
28	28W T5, (4 ft)
32	32W T8, (4 ft)
54	54W T5, (4 ft)

three	Options
E1	One lamp emergency service
SJO	10' of 16/3 cable, prewired
2C	Two circuit wired
DC	12-24 Volt DC
R	Red filter tubes (1, 2, or 3)

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.