



M100RW

Marine Recessed Mount Ceiling Fluorescent

PRODUCT SPECIFICATION

Overhead Lighting

M100RW Series

The M100RW Series is designed and constructed for commercial marine and wet location recessed mount ceiling applications. The design is drip-proof and easy to install and service.

Mounting

Recessed mount to ceiling.

Housing

Die-formed marine grade aluminum housing with continuously welded seams and liquid tight cord grip.

Lens

Prismatic acrylic.

Lens Frame

Seamless extruded aluminum with piano hinge and spring loaded quarter-turn fasteners.

Lamp Holder

Vibration resistant spring loaded medium bi-pin lamp holders keep lamps securely in position.

Finish

White, powder coat polyester, inside and out, phosphate pretreated to ensure superior adhesion and corrosion resistance.

Ballast

Standard universal 120-277 VAC, 50/60 Hz, electronic ballast.
**Contact factory for other options.*

Weight

4 ft: 20.6 lbs (9.34 kg)
2 ft: 15 lbs (6.8 Kg)

Certifications

IP 54 rated. USCG ABS approved.
UL 1598A marine listed.

Applications

- Narrow Housing
- Passageways
- Work Stations



Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

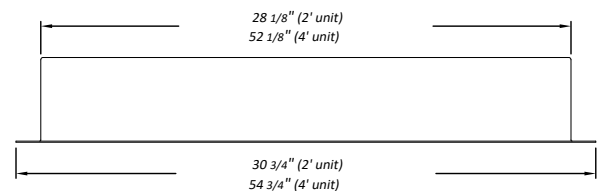

| | | | |
|--------|-----|-----|-------|
| M100RW | one | two | three |
| | - | - | - |

| | |
|------------|-----------------------|
| one | Luminaire Size |
| 2 | 2-ft fixture |
| 4 | 4-ft fixture |

| | |
|------------|------------------|
| two | Lamp Type |
| 17 | 17W T8, (2 ft) |
| 28 | 28W T5, (4 ft) |
| 32 | 32W T8, (4 ft) |
| 54 | 54W T5, (4 ft) |

| | |
|--------------|-----------------------------|
| three | Options |
| E1 | One lamp emergency service |
| SJO | 10' of 16/3 cable, prewired |
| 2C | Two circuit wired |
| DC | 12-24 Volt DC |

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.