



## Overhead Lighting

### M2 Series

The M2 Series is designed for surface-mounted use. Constructed from glass-reinforced polyester, with an acrylic diffuser.

#### Mounting

Surface-mounts to ceilings via zinc-plated, corrosion resistant, shock resistant brackets. Stainless steel brackets available.

#### Housing

One-piece high-impact white glass-reinforced polyester, fire-resistant material. Housing features a factory-installed cable access stuffing tube.

#### Lens

One piece impact resistant clear textured acrylic seated against a seamless, poured-in-place gasket.

#### Lens Retention

Quick release tool-less, molded celcon or stainless steel catches.

#### Ballast

Standard universal 120-277 VAC, 50/60 Hz, electronic ballast.

*\*Contact factory for other options.*

#### Certifications

IP 54 rated. USCG ABS approved.

UL 1598A marine listed.

#### Applications



- High moisture areas
- Work stations
- Passageways
- Oil platforms
- Processing plants
- Engine rooms

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

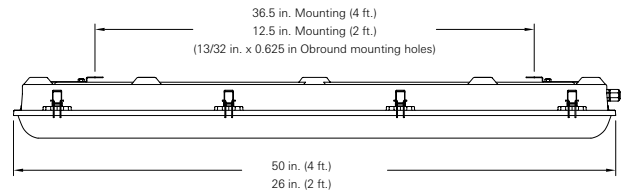

<b>M2</b>	-	one	-	two	-	three
-----------	---	-----	---	-----	---	-------

one	Lamp Type	two	Lamp Quantity	three	Options
14	14W T5, (2 ft)	1	One	E1	One lamp emergency service
17	17W T8, (2 ft)	2	Two	2ST	2 Stuffing tubes, one each end
24	24W HO T5, (2 ft)	3	Three	SJO	10' of 16/3 cable, pre-wired
28	28W T5, (4 ft)	<i>(available with 14W T5 (2 ft), 28W T5 (4 ft) and 32W T8 (4 ft))</i>		2C	Two circuit wired
32	32W T8, (4 ft)			DC	12/24 Volt DC
54	54W HO T5, (4 ft)			SL	Stainless steel lens retention
				SM	Stainless steel mounting feet

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.