



M290-LED

Commercial Marine **LED**
PRODUCT SPECIFICATION

Detail Light M290 Series

The M290 Series is a simple watertight lighting solution. It is available with a white, red, or blue diffusing lens; an optional toggle switch; and 24VDC or 28VDC. Watertight, supplied with a boot for the toggle switch option.

Housing

Manufactured of cast aluminum. Packed with a liquid and oil tight cord grip.

Housing

Thermoformed white or prismatic 1/4" acrylic lens secured to the housing with four captive screws. Gasketed with a closed cell neoprene O-ring for a watertight seal.

Lamp

1,000 Lumen SMT LED Array,
4000K CCT, >80 CRI, 100,000 hrs.

Weight


1.5 lbs (0.7kg)

Features


Watertight housing
UL 1598A marine
IP67

Applications

Refrigerated spaces
Detail light
Small areas
Emergency circuits

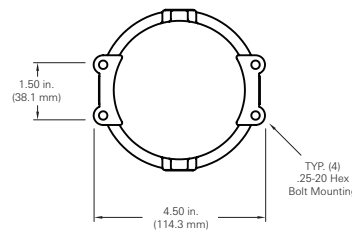

Bottom View

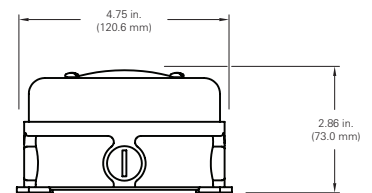

Side View



one Voltage

24 24V
28 28V

two Lens

W White acrylic
R Red acrylic
B Blue acrylic
P Clear prismatic acrylic

three Options

TS Toggle switch

Modifications are available to meet custom requirements.
Specifications and dimensions are subject to change without notice.