



PRODUCT SPECIFICATION

The M3 Series is designed for surface mounted use and is constructed from marine grade aluminum with an acrylic diffuser.

**Mounting**

Surface mounts to ceilings via zinc-plated, corrosion and shock-resistant brackets.

**Lens**

One piece impact resistant, clear textured acrylic held in place with quick release spring brackets.

**Housing**

16 gauge marine grade sheet aluminum die-formed to shape with cast aluminum ends.

**Finish**

White powder coat polyester finish with phosphate pretreatment to ensure superior adhesion.

**Wiring**

Reflector-mounted electrical components for easy wiring and maintenance accessed via quarter turn thumb screws.

**Weight**

2 ft fixture - 15 lbs  
4 ft fixture - 25 lbs

**Certifications**

IP 65 rated. USCG ABS approved.  
UL 1598A marine listed.

**Applications**



- High moisture areas
- Work stations
- Passageways
- Oil platforms
- Processing plants
- Engine rooms

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

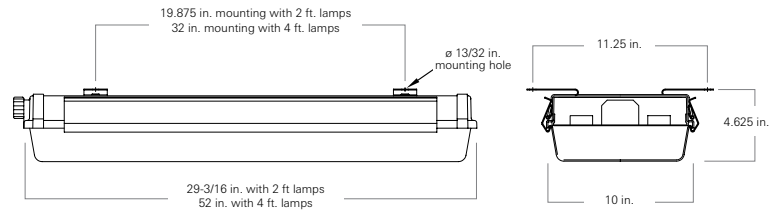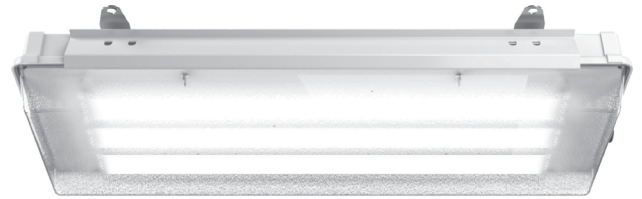

<b>M3</b>	-	one	-	two	-	three

**one Lamp Type**

- 17 17W T8, (2 ft)
- 28 28W T5, (4 ft)
- 32 32W T8, (4 ft)
- 54 54W T5, (4 ft)

**two Lamp Quantity**

- 1 One
- 2 Two
- 3 Three

**three Options**

- E1 One lamp emergency service
- 2ST Two stuffing tubes, one each end
- SJO 10 ft. of 16/3 cable, prewired
- 2C Two circuit wired
- DC 12/24 Volt DC
- WG Wire guard

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.