



M450-LED

Marine Surface Mount Wall **LED**

PRODUCT SPECIFICATION

The M450 series is designed for berth and bunk lighting in seaborne vessels and offshore platforms.

Mounting

Surface-mounts to bulkheads.

Electrical

High output LEDs powered by 120-277V 50/60Hz driver

Lens

Extruded, impact-resistant, white acrylic lens.

Housing

Extruded aluminum housing with die-cast ends.

Finish

Polyester powder-coated after phosphate pre-treatment for superior adhesion and corrosion resistance.

Wiring

Available with a single receptacle outlet and lighted switch.

Certifications


IP 20 rated. USCG ABS approved. UL 1598A marine listed.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

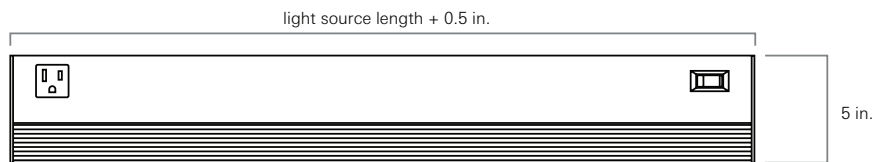

one LED Wattage / Length

- LED12 12 in. 4.8W LED, 420 lumens, 4000K standard
- LED24 24 in. 9.6W LED, 840 lumens, 4000K standard
- LED36 36 in. 14.4W LED, 1260 lumens, 4000K standard

two Options

- CO Convenience outlet
- SW Switch
- USB USB Charging Port

Modifications are available to meet custom requirements.