



M608

Marine Recess Mount Grid Ceiling

PRODUCT SPECIFICATION

Overhead Lighting M608 Series

The M608 Series is a drip-proof fluorescent fixture for recessed "T" grid ceiling applications. Constructed from marine-grade aluminum with an acrylic diffuser.

Mounting

Recess mounts in "T" grid ceiling.
Includes shock-resistant brackets and liquid-tight cord grip.

Lens

Prismatic acrylic

Lens Frame

Seamless extruded aluminum with piano hinge and spring loaded quarter-turn closure fasteners.

Housing

Die-formed aluminum with welded seams.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Ballast

Standard universal 120-277 VAC, 50/60 Hz, electronic ballast (consult factory for other options).

Weight

4 ft: 16 lbs (7.3 kg)
2 ft: 10 lbs (4.5 Kg)

Certifications

IP 54 rated. USCG ABS approved.
UL 1598A marine listed.

Applications

- "T" Grid Ceiling
- Accommodations
- Large Open Areas
- Passageways
- Work Stations



Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

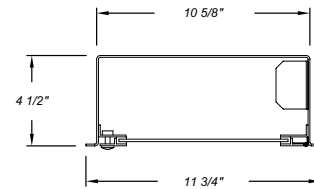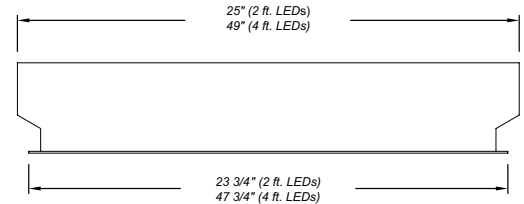

M608 - one - two - three

- one Lamp Type**
- 17 17W T8, (2 ft)
 - 28 28W T5, (4 ft)
 - 32 32W T8, (4 ft)
 - 54 54W T5 HO, (4 ft)
- two Lamp Quantity**
- 2 Two
 - 3 Three
 - 4 Four

- three Options**
- E1 One lamp emergency service
 - E2 Two lamp emergency service
 - SJO 10' of 16/3 cable, pre-wired
 - DC 12/24 Volt DC
 - 2C Two circuit wired

Modifications are available to meet custom requirements.
Specifications and dimensions are subject to change without notice.