



M711

Marine Recess Mount Dampa-style Ceiling

PRODUCT SPECIFICATION

Overhead Lighting M711 Series

The M711 Series unique universal mounting brackets are designed to allow either perpendicular or parallel recessed installation in modular ceilings. One fixture does both jobs.

Mounting

Fits recessed within suspended ceilings.

Housing

Cold-rolled steel housing fits suspended ceiling systems using standard 11 13/16" (300 mm) linear ceiling panels with 1" (25mm) recess. Gap between housing and door on all sides provides clearance for ceiling panel lip, eliminating on-site ceiling panel notching.

Door

Marine Grade Aluminum. Hinged door is retained with captive 1/4 turn closure screws and features side-off removal from housing. Doors are one ceiling panel wide, two or four panels long depending on fixture length.

Lens

Prismatic acrylic diffuser.

Lamps

Two lamps retained by vibration resistant spring loaded lamp holders.

Finish

White, powder coat polyester.

Ballast

Standard universal 120-277 VAC, 50/60 Hz, electronic ballast (contact factory for other options).

Certifications

IP 44 rated. ABS approved.
UL 1598A marine listed.

Applications


- Dampa-style suspended ceilings
- Hallways
- Common Rooms

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

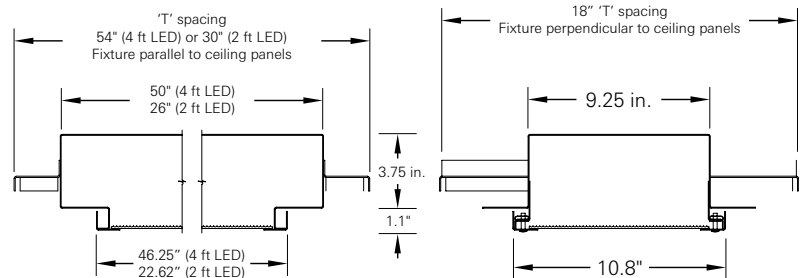

M711	-	one	-	two

one	Lamp Type
17	17W T8, (2 ft)
28	28W T5, (4 ft)
32	32W T8, (4 ft)
54	54W T5 HO, (4 ft)
60	60W T12 HO, (4 ft)

two	Options
E1	One lamp emergency service
2C	Two circuit wired
U30	30mm U channel carrier mounting brackets
C16	Dampa DCC 300 carrier 16 mounting brackets

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.