



M711

Marine Recess Mount Dampa-style Ceiling

PRODUCT SPECIFICATION

Overhead Lighting M711 Series

The M711 Series unique universal mounting brackets are designed to allow either perpendicular or parallel recessed installation in modular ceilings. One fixture does both jobs.

Mounting

Fits recessed within suspended ceilings.

Housing

Cold-rolled steel housing fits suspended ceiling systems using standard 11 13/16" (300 mm) linear ceiling panels with 1" (25mm) recess. Gap between housing and door on all sides provides clearance for ceiling panel lip, eliminating on-site ceiling panel notching.

Door

Marine Grade Aluminum. Hinged door is retained with captive 1/4 turn closure screws and features side-off removal from housing. Doors are one ceiling panel wide, two or four panels long depending on fixture length.

Lens

Prismatic acrylic diffuser.

Lamps

Two lamps retained by vibration resistant spring loaded lamp holders.

Finish

White, powder coat polyester.

Ballast

Standard universal 120-277 VAC, 50/60 Hz, electronic ballast (contact factory for other options).

Certifications

IP 44 rated. ABS approved.
UL 1598A marine listed.

Applications

- Dampa-style suspended ceilings
- Hallways
- Common Rooms


Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

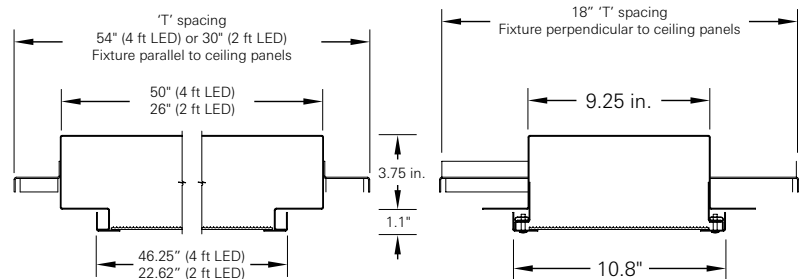

M711	-	one	-	two

one 17 17W T8, (2 ft) 28 28W T5, (4 ft) 32 32W T8, (4 ft) 54 54W T5 HO, (4 ft) 60 60W T12 HO, (4 ft)	two Options E1 One lamp emergency service 2C Two circuit wired U30 30mm U channel carrier mounting brackets C16 Dampa DCC 300 carrier 16 mounting brackets
--	---

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.