



MIL-F-16377/13

600 Series

Standard Mount Flush Mount Fluorescent

PRODUCT SPECIFICATION

Overhead Lighting 600 Series

The 600 Series is a dripproof high output fluorescent light fixture for general lighting.

Mounting

Mounts to ceiling surfaces or flush within them.

Light Source

Three 60W T12 lamps, powered by 120V 60Hz ballast.

Lens

Standard with clear prismatic lens.

Housing

Constructed from die cast .090 marine grade aluminum.

Cable

Supplied with 10 ft. of LSDSGA-4 cable.

Standard Mounting

Overall Dimensions: 52-1/16" X 14-13/16" X 8-3/16".
Net weight: 60 lbs. 0 oz. maximum.
Approximate shipping weight for individual unit: 67 lbs.


Flush Mounting

Overall Dimensions: 55-9/16" X 17-1/2" X 4-5/16".
Net weight: 67 lbs. 0 oz. maximum.
Approximate shipping weight for individual unit: 72 lbs.


Certifications

First Article Qualified.

Contact factory for specific requirements.

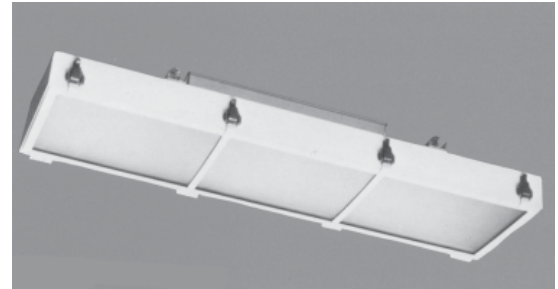

M16377/13-74
NSN 6310-00-474-5653
Standard Mount

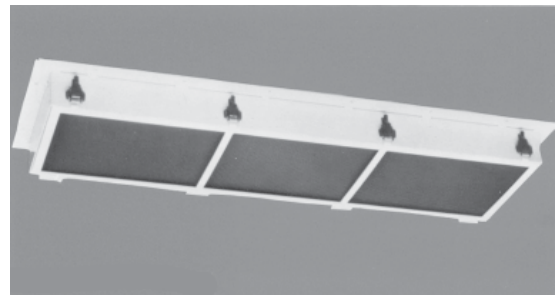

M16377/13-74.1
NSN 6310-00-474-5653
Flush Mount



MIL-SPEC	SYMBOL	one	two
M16377/13	-	-	-

Symbol	Mounting
74	Standard mount
74.1	Flush Mount

one	Lens Color Option
A	Amber Prismatic
R	Red Prismatic
B	Blue Prismatic

two **Option**
Contact factory for cable options

Replacement Item	L.C. Doane Part Number	Symbol	NSN
Ballast	P-1649-S	Com'l designation F48T12/HO	-
60W T12 Lamp	P-941-S	MS18226-1	6240-00-933-5075
Lampholder	P-1361-AS	UL 542	6250-00-906-8084
Clear Prismatic Lens	B-1703-SP	M16377/13-001	6210-00-877-8799
Red Prismatic Lens	B-1748-SP	M16377/13-002	6210-00-902-0228
Amber Prismatic Lens	B-1825-SP	M16377/13-003	6210-01-166-7183
Blue Prismatic Lens	-	-	-
Shockmount Internal	B-1669-S	M16377/41-028	-
Shockmount External	A-1036-JS	M16377/41-026	6210-00-396-1717

Modifications are available to meet custom requirements.
Specifications and dimensions are subject to change without notice.