



# MIL-DTL-16377

600A-LED Series

Standard Mount **LED**  
PRODUCT SPECIFICATION

## Overhead Lighting 600A-LED Series

The 600A-LED series is a drip proof high output LED light fixture for general lighting.

### Light Source

White 4000K 85 CRI LED - 14,000 Lumens 129W  
Amber LED (2nd circuit option) - 3,900 Lumens 65W  
Red LED (2nd circuit option) - 1,500 Lumens 65W  
Cyan LED (2nd circuit option) - NVIS 65W

### Input Voltage

115VAC 60Hz

### Lens

1/8" diffusing polycarbonate lens sealed to housing via silicone gasketing.

### Housing

Constructed of die formed, continuously welded marine grade aluminum.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

### Hardware

Stainless steel fasteners

### Cable

Fixture comes without cable unless requested by customer. Please contact L.C. Doane for cable options.

### Dimensions

13" X 28" matches M16377/13 & /85  
Overall Dimensions: 52-1/4" X 14-3/4" X 5-5/16".  
Standard mount (with cable): 50.2 lbs.


### Certifications

First Article Qualified.


Contact factory for specific requirements



M16377J-74SSL

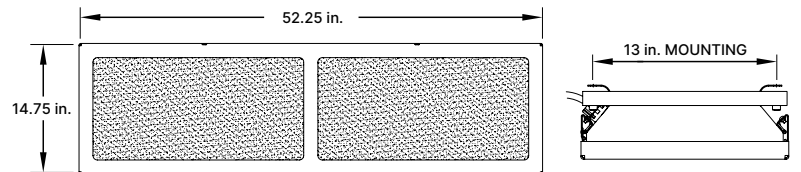

### SIDE VIEW OF DOOR HINGE

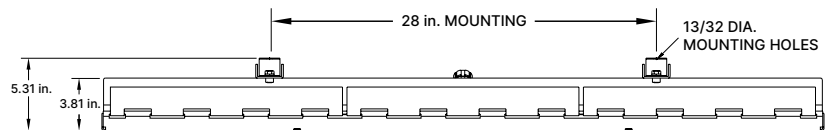

MIL-SPEC SYMBOL one two  
M16377 - 74SSL - -

Symbol	Mounting	one	Light Color Variant	two	Options
74SSL	Standard mount with white diffusing lens	A	White and Amber		Contact L.C. Doane for Cable Options
		R	White and Red		
		NV	White and Night Vision		

Replacement Item	L.C. Doane Part Number	Symbol	NSN
Driver	P-606-S	-	5998-01-652-7364
White Lamp Assembly	B-606-S	-	-
Red Lamp Assembly	B-605E-R-S	-	-
Amber Lamp Assembly	B-605E-NV-S	-	-
Lens	A-4268-HK	-	6210-01-491-0168
Shockmount	A-1036-JC	-	5975-01-591-0133

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.