



Overhead Lighting

600A-LED Series

The 600A-LED series is a drip proof high output LED light fixture for general lighting.

Light Source

White 4000K 85 CRI LED - 14,000 Lumens 129W
 Amber LED (2nd circuit option) - 3,900 Lumens 65W
 Red LED (2nd circuit option) - 1,500 Lumens 65W
 Cyan LED (2nd circuit option) - NVIS 65W

Input Voltage

115VAC 60Hz

Lens

1/8" diffusing polycarbonate lens sealed to housing via silicone gasketing.

Housing

Constructed of die formed, continuously welded marine grade aluminum.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel fasteners

Cable

Fixture comes without cable unless requested by customer. Standard LSFHOF-3 and Grounded 7XW-3 cable assemblies available.

Dimensions



13" X 28" mounting matches M16377/13 & /85
 Overall Dimensions: 52-1/4" X 14-3/4" X 5-5/16".
 Standard mount (with cable): 50.2 lbs.

Certifications

First Article Qualified.



M16377J-74SSL

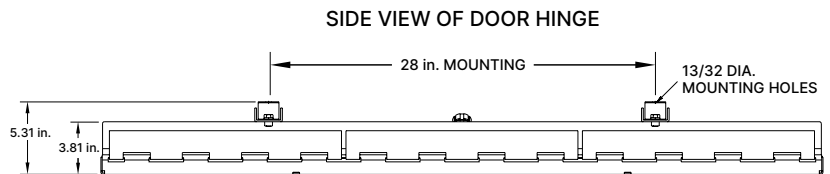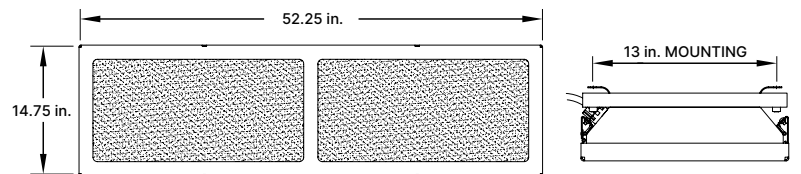

MIL-SPEC	SYMBOL	one	two
M16377	74SSL	-	-

Symbol	Mounting	one	Light Color Variant	two	Options
74SSL	Standard mount with white diffusing lens	A	White and Amber		<i>Standard</i>
		R	White and Red	LS10	10'6", LSFHOF-3
		NV	White and Night Vision	LS15	15'6", LSFHOF-3
				LS20	20'6", LSFHOF-3
					<i>Grounded</i>
				10G	10'6", 7XW-3
				15G	15'6", 7XW-3
				20G	20'6", 7XW-3

Replacement Item	L.C. Doane Part Number	Symbol	NSN
Driver	P-606-S	-	5998-01-652-7364
White Lamp Assembly	B-606-S	-	-
Red Lamp Assembly	B-605E-R-S	-	-
Amber Lamp Assembly	B-605E-NV-S	-	-
Lens	A-4268-HK	-	6210-01-491-0168
Shockmount	A-1036-JC	-	5975-01-591-0133

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.