



MIL-DTL-16377

600A-LED Series

Standard Mount **LED**
PRODUCT SPECIFICATION

Overhead Lighting 600A-LED Series

The 600A-LED series is a drip proof high output LED light fixture for general lighting.

Light Source

White 4000K 85 CRI LED - 14,000 Lumens 129W
Amber LED (2nd circuit option) - 3,900 Lumens 65W
Red LED (2nd circuit option) - 1,500 Lumens 65W
Cyan LED (2nd circuit option) - NVIS 65W

Input Voltage

115VAC 60Hz

Lens

1/8" diffusing polycarbonate lens sealed to housing via silicone gasketing.

Housing

Constructed of die formed, continuously welded marine grade aluminum.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel fasteners

Cable

Fixture comes without cable unless requested by customer. Please contact L.C. Doane for cable options.

Dimensions

13" X 28" matches M16377/13 & /85
Overall Dimensions: 52-1/4" X 14-3/4" X 5-5/16".
Standard mount (with cable): 50.2 lbs.



Certifications

First Article Qualified.

Contact factory for specific requirements



M16377J-74SSL

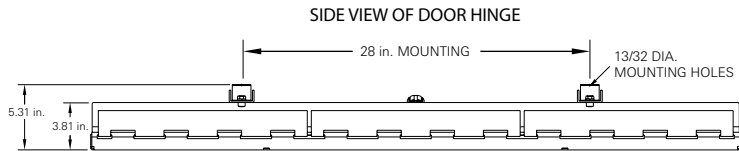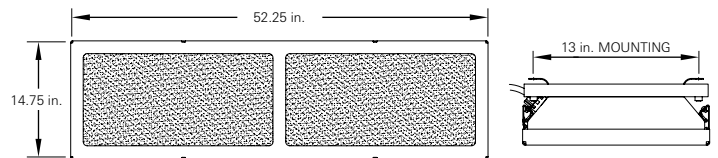

MIL-SPEC SYMBOL one two
M16377 - 74SSL - -

Symbol	Mounting	one	Light Color Variant	two	Options
74SSL	Standard mount with white diffusing lens	A	White and Amber		Contact L.C. Doane for Cable Options
		R	White and Red		
		NV	White and Night Vision		

Replacement Item	L.C. Doane Part Number	Symbol	NSN
Driver	P-606-S	-	5998-01-652-7364
White Lamp Assembly	B-606-S	-	-
Red Lamp Assembly	B-605E-R-S	-	-
Amber Lamp Assembly	B-605E-NV-S	-	-
Lens	A-4268-HK	-	6210-01-491-0168
Shockmount	A-1036-JC	-	5975-01-591-0133

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.