



MIL-F-16377/57

605-LED Series

Flush Mount **LED**

PRODUCT SPECIFICATION

Overhead Lighting

605-LED Series

The 605-LED series MIL-F-16377/57 is designed for general purpose naval lighting in maritime environments.

Light Source

Six LED arrays, powered by 120V 60Hz drivers, provide 44.3W 0.39A of solid state illumination.

Lens

Optic Plus LED diffusing acrylic lens, standard.

Cable

Supplied with 10' of LSTHOF-3 cable.

Flush Mounting


Overall Dimensions: 23 3/4" X 23 3/4" X 5".

Certifications

First Article Qualified.



Flush Mount
M16377/57-350SSL

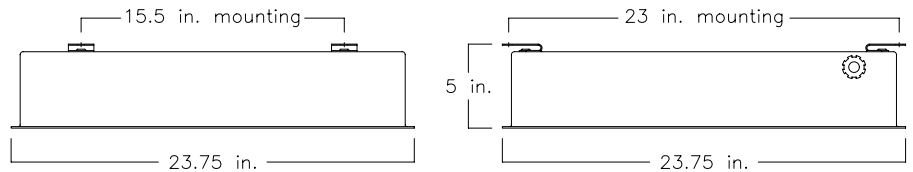

MIL SPEC NUMBER	SLANT	SYMBOL	one
M16377	/	-	-

Slant	Electrical rating	one	Options
57	Six LED arrays	R	Two red LED arrays
		10G	10' LSFHOF-3 ground cable
Symbol	Mount		
350SSL	Flush mount with diffusing acrylic lens		

Replacement item	L.C. Doane Number	Military Number	NSN
1 Driver & 1 White Array Kit	B-3335A	-	-
Window & Gasket Assembly	B-1543L-SP	-	-
Shockmount	B-1591-BS	M16377/41-008	6210-01-393-4302

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.