



Overhead Lighting

202CP Series

The 202CP Series is a watertight fluorescent luminaire for vertical panel board lighting in maritime environments.

Mounting

Mounts to ceiling surfaces or flush within them.

Light Source

Two 8W T5 lamps, powered by two 120V 60Hz ballasts.

Lens

1/4 in. thick clear and white prismatic lens.

Housing

Made from sheet aluminum die-formed to shape with cast aluminum ends.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Cable

Supplied with 10 ft. of LSTHOF-3 cable.

Standard Mounting

Overall Dimensions: 16-5/16" X 7-5/8" X 3-1/2".

Net weight: 7 lbs. 8 oz. maximum.

Approximate shipping weight for package of eight: 65 lbs.

Flush Mounting

Overall Dimensions: 18-11/16" X 9-15/16" X 3-1/2".

Net weight: 8 lbs. 12 oz. maximum.

Approximate shipping weight for package of eight: 76 lbs.


Certifications

First Article Qualified.

*Contact factory for more specified options.



Standard Mount
M16377/6-149.4
NSN 6210-00-548-0226

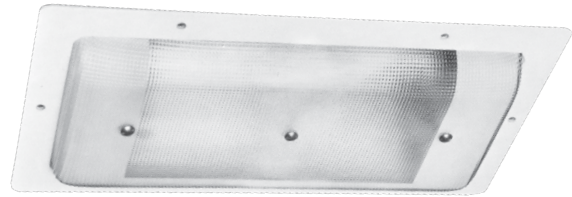

Flush Mount
M16377/6-149.5
NSN 6210-01-339-7007



MIL-SPEC	SLANT	SYMBOL	one	two	three	four
M16377	6	-	F	-	-	10G

Symbol	Mounting	one	Mounting	three	Switch Option
149.4	Standard mount clear and white prismatic lens	F	Flush mount	S	One DPST switch
149.5	Flush mount clear and white prismatic lens	two	Lamp Filter Tube	SS	Two DPST switches
		B	Blue	four	Cable option
		R	Red	10G	10' low smoke ground cable
		Y	Amber		

Replacement Item	L.C. Doane Number	Military Number	NSN
Ballast	P-337-S	M16377/45-001	6250-00-295-2735
8W T5 Lamp	P-1-S	MS15588-3	6240-00-299-5546
Prismatic lens	B-1719-NS	M16377/6-002	-
DPST Toggle Switch	P-573-SP	MS16569-1	5930-00-719-9659
Shockmount	B-1591-AS	M16377/41-010	6210-00-973-1748

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.