



Wall Lighting

MSTP Series

The MSTP series is designed for step and detail lighting in high abuse environments.

Mounting

Mounts recessed in step or wall.

Housing

16 gauge cold rolled steel, die formed to shape with seams welded and ground smooth.

Door

18 gauge one piece, die formed cold rolled steel. Aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof door fasteners. A mounting bracket and mounting screws are provided.

Wiring

All electrical components are mounted to a removable wireway for easy wiring.

Certifications

UL Listed damp location.

Applications



- Wall Illumination
- Step Illumination

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

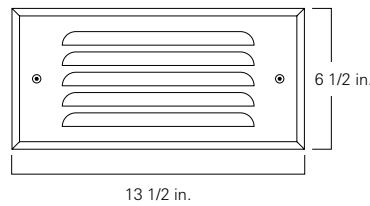

one two three four five six seven eight

STP

one	Lamps (not included)	four	Voltage	seven	Fasteners
5	5W 4" T4 TT	120	120 V, 60 Hz	AP	Stainless steel allen head with pin
7	7W 5" T4 TT	277	277 V, 60 Hz	TP	Stainless steel torx head with pin
9	9W 6" T4 TT			PH	Phillips, non-security
13	13W 7" T4 TT (standard)	five	Ballast	eight	Options
two	Door Material	CO	Core and Coil (standard)	EM	Emergency battery power
A	Aluminum	HP	High power factor	LD	Louvered door
C	Cold rolled steel (standard)	six	Lens		
S	Stainless steel	52	.125 in. white acrylic		
three	Door Finish	53	.125 in. K12 prismatic acrylic		
R	Brushed stainless steel	12	.125 in. K12 prismatic polycarbonate		
W	White (standard)	00	none, <u>only with louvered door option</u>		

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.