



Surface Lighting MXTL Series

Designed and constructed from marine grade aluminum with a lexan lens for commercial marine dripproof applications

Mounting

Surface wall mount or mounting canopy for ceiling and end mount.

Lighting Source

Parallel wired high output LED panel.

Housing

Marine grade aluminum with four flush head stainless door retaining screws. Universal enclosure mounting design with individual full length canopies for end and ceiling mounts.

Lens

1/4" Lexan lens. Drop in EXIT stencil face with pop-out directional arrows.

Finish

White, powdercoat polyester, inside and out, phosphate pretreated to ensure superior adhesion and rust resistance.

Emergency Power (120 min)

Emergency units include a nickel-cadmium battery, and 120/277 dual voltage solid state charger with power indicator lights and test switch.

Lamps

Driver provided with pre-wired 3-wire self-aligning input power quick disconnect and 2-wire quick disconnect to LED module.

Certifications

Dripproof, Wet location 924 ETL listed, U.S.C.G-ABS

Applications

- Exit illumination

Job Name

Fixture Type


Catalog No.

Approval

Date



End mount canopy

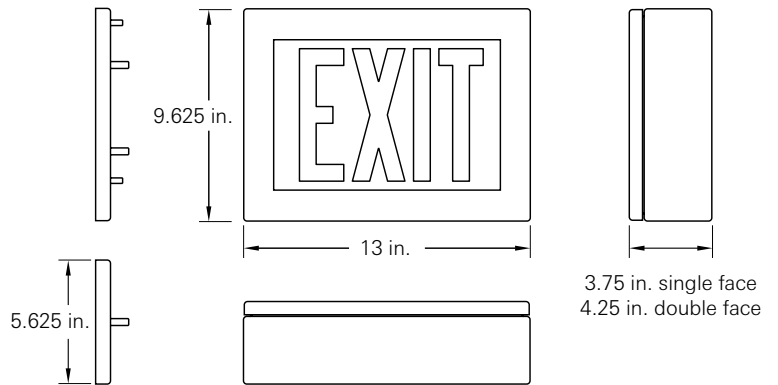

	one	two	three	four	five	six	seven
MXTL	A	W	-	-	-	-	-

one	Material
A	Aluminum, <u>standard</u>
two	Finish
W	White, <u>standard</u>
three	Voltage
120	120V, 60Hz
277	277V, 60Hz
four	Face Quantity
S	Single
D	Double

five	Letter Color
R	Red
G	Green
six	Mounting
W	Wall
C	Ceiling
E	End
seven	Options
24F	24 V Flashing fire alarm
EM	Emergency battery backup (120 min)
F	Emergency mode flasher

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.