



PRODUCT SPECIFICATION

Cleanrooms, laboratories, research facilities, kitchen areas, and natatoriums.

**Mounting**

Recessed for 1" - 1 1/2" T-Grid ceilings.

**Housing**

18 gauge cold rolled steel die-formed to shape with seams welded, ground smooth, and caulked airtight.

**Door**

One-piece 18 gauge cold rolled steel, gasketed and sealed overlapping door. Freedom Hinge™ design permits removal and hinging from either side. Aluminum and 304 stainless steel available.

**Lens**

K12 prismatic lens installed smooth-side out towards the environment.

**Finish**

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel door available.

**Hardware**

Recessed stainless steel fasteners.

**Certifications**


UL Listed wet location, IP66 rated. Suitable for use in ISO-3 rated cleanrooms (209E Class 1).

Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_ Date \_\_\_\_\_

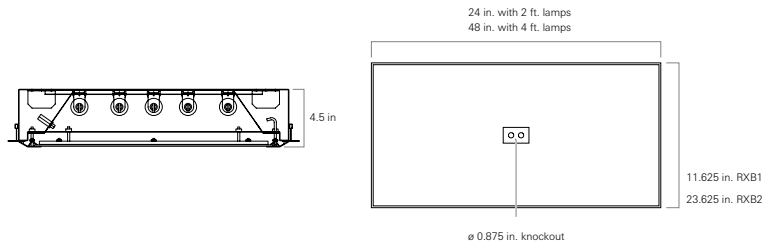

one	two	three	four	five	six	seven	eight	nine
<b>RXB</b>	-	/	-	-	-	-	-	-

- one Luminaire Width**
- 1 1 ft., three lamp maximum
  - 2 2 ft.

- two Lamp Quantity**
- 2 two
  - 3 three
  - 4 four
  - 5 five
  - 6 six

- three Lamps (Not Included)**
- 14 2 ft. 14 W T5
  - 17 2 ft. 17 W T8
  - 24 2 ft. 24W T5 HO
  - 4B 2 ft. 40 W T5 biax
  - 28 4 ft. 28 W T5
  - 32 4 ft. 32 W T8
  - 54 4 ft. 54 W T5 HO

- four Voltage**
- 120 120 V, 60 Hz
  - 277 277 V, 60 Hz
  - 347 347 V, 60 Hz
  - VAR Variable, 120-277 V, 50/60Hz

- five Ballast**
- DM Dimming
  - EL Electronic Instant Start, std T8
  - PR Program Rapid Start, std T5, option T8

- six Lens**
- 12 .125 in. K12 prismatic polycarbonate
  - 15 .156 in. K12 prismatic polycarbonate
  - 53 .125 in. K12 prismatic acrylic
  - 113 .125 in. K12 prismatic acrylic with RFI Grid

- seven Door Material**
- A Aluminum
  - C Cold rolled steel, standard
  - S Stainless steel

- eight Door Finish**
- R Brushed stainless steel
  - W White

- nine Options**
- CU Canadian UL Listing
  - E1 One lamp emergency ballast
  - E2 Two lamp emergency ballast
  - FH Fuse and holder
  - RF Radio interference filter, one per circuit
  - AH Painted aluminum housing
  - SH Painted stainless steel housing
  - SB Brushed stainless steel housing
  - NL Night light for 7 W or 9 W PL bipin
  - NL-LED Night light, LED
  - TP Stainless steel torx head fasteners

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.