



RXC-LED

Cleanroom - low profile **LED** Ceiling surface or grid 1 in. T-grid ceiling

PRODUCT SPECIFICATION

Low profile - 2 in. above ceiling, 2.375 in. O.A. depth. Cleanrooms, laboratories, research facilities, kitchen areas, vivariums, natatoriums.

Mounting

Ceiling surface mount or recessed in 1 in. T-grid ceiling. Knockouts for earthquake cable supports provided.

Housing

18 gauge cold rolled steel die-formed to shape with seams welded, ground smooth, and caulked airtight. Aluminum and stainless steel available.

Door

One-piece 18 gauge cold rolled steel, gasketed and sealed overlapping door. Freedom Hinge™ design permits removal and hinging from either side. Aluminum and stainless steel available.

Lens

Optic Plus lens (standard) completely hides diode image while providing greater than 90% light transmission.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Driver

0-10Vdc dimming, Range 1%-100%, Factory programmable -40C Min. starting temperature, 0.9 PF, >20% THD

Wiring

Driver provided with pre-wired 3-wire self-aligning input power quick disconnect and 2-wire quick disconnect to LED module.

Certifications

UL Listed wet location, IP66 rated and certified NSF2 for splash/non-food zones (option). Suitable for use in ISO-3 clean rooms (209E Class 1).




Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

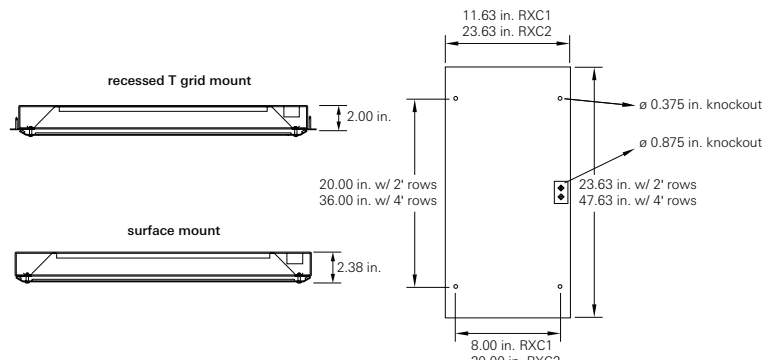

RXC	one	two	three	four	five	six	seven	eight	nine	ten	eleven	twelve	DM
-----	-----	-----	-------	------	------	-----	-------	-------	------	-----	--------	--------	----

- one Luminaire Size**
- 12 1 x 2, two rows max
 - 14 1 x 4, two rows max
 - 22 2 x 2, four rows max
 - 24 2 x 4, four rows max

two LED Source
Refer to the LED Source Table on Page 2 for available options.

- three Color Temperature**
- 30 3000K
 - 35 3500K
 - 40 4000K
 - 50 5000K

- four CRI**
- 80 80 CRI
 - 90 90 CRI

- five Housing Material**
- A Aluminum
 - C Cold rolled steel, standard
 - S Stainless steel

- six Housing Finish**
- R Brushed stainless steel
 - W White

- seven Door Material**
- A Aluminum
 - C Cold rolled steel, standard
 - S Stainless steel

- eight Door Finish**
- R Brushed stainless steel
 - W White

- nine Voltage**
- 120 120 V, 60 Hz
 - 277 277 V, 60 Hz
 - VAR Variable, 120-277 V, 50/60Hz

- ten Driver**
- DM 0-10Vdc Dimming, standard

- eleven Internal Lens**
- 122 Optic Plus LED diffusing acrylic lens, std
 - 122R Optic Plus with RF grid Must be used with RF filter*

- twelve Options**
- 2C Two circuit wired
 - AM Anti-microbial coating (exposed areas)
 - CU Canadian UL Listing
 - CP CCEA Chicago
 - EM Emergency battery backup
 - FH Fuse and holder
 - IMS Integral Occ Sensor
 - NL-LED Night light, LED
 - NS NSF listing
 - RF Radio interference filter, one per circuit
 - TP Stainless steel torx head fasteners**

**Not available with NSF option

Note: The L.C. Doane outset door firmly secures the fixture to the T-Grid which should satisfy the need for earthquake clips. Four knock-outs are also provided, one in each corner of the fixture, for seismic support wire attachment (by others).

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.

CRI	LED Life
>80	>100,000

LED Source (Box 2)	3000K		3500K		4000K		5000K		Input Watts
	Delivered Lumens	L/W	Delivered Lumens	L/W	Delivered Lumens	L/W	Delivered Lumens	L/W	
1' x 2' Fixture									
1W20	2146	125	2178	127	2252	132	2306	135	17.1
1W35	3535	123	3588	125	3693	129	3799	132	28.7
2W55	5282	133	5361	135	5519	139	5677	143	39.6
1' x 4' Fixture									
1W55	5282	133	5361	135	5519	139	5677	143	39.6
1W70	7070	129	7176	131	7387	135	7598	139	54.8
2W100	9616	134	9759	136	10046	141	10333	145	71.5
2W120	11492	134	11664	136	12007	140	12350	144	86.0
2W140	14140	129	14352	131	14774	135	15196	139	109.6
2' x 2' Fixture									
2W55	5281	133	5360	135	5518	139	5675	143	39.6
2W70	7069	129	7174	131	7385	135	7596	139	54.8
4W95	9098	135	9233	137	9505	141	9777	145	67.6
4W120	11489	134	11661	136	12004	140	12347	144	86.0
4W145	14137	129	14348	131	14770	135	15192	139	109.6
2' x 4' Fixture									
2W55	5325	145	5405	148	5564	152	5723	156	36.6
2W90	8819	138	8950	141	9213	145	9477	149	63.7
2W120	11808	137	11984	139	12337	143	12689	148	86.0
2W150	14529	133	14746	135	15180	139	15614	142	109.6
3W220	21794	133	22119	135	22770	139	23421	142	164.4
4W270	26389	135	26783	137	27571	141	28358	145	195.3
4W300	29059	133	29493	135	30360	139	31277	143	219.1

Specified Output Option

LC Doane programmable drivers allows us to deliver a specific lumen output. If none of the options in the chart above fit your application, let us know the desired lumen output and we will do the rest. See the example for a 2x4 on how this will be specified:

Example Model:

RXC24-**XX**¹SO-40/80-CW/CW-VARDM-122/00-(**XX**²/LUMENS)

LUMENS = You provide the lumens.

XX¹ = We will determine the number of rows.

XX² = We will provide the wattage information.

Photometric Data @ 80 CRI with 122 lens

33 lens multiplier	.86
90 CRI multiplier	.83

