



PRODUCT SPECIFICATION

The SCA series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface-mounts to corners.

Housing

Die-formed cold rolled steel with seams welded and ground smooth. Stainless steel available.

Door

One piece, die-formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Recessed, stainless steel, tamper-proof fasteners.

Wiring

Reflector-mounted electrical components for easy wiring and maintenance.

Certifications



UL Listed damp or wet location. Covered ceilings only.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

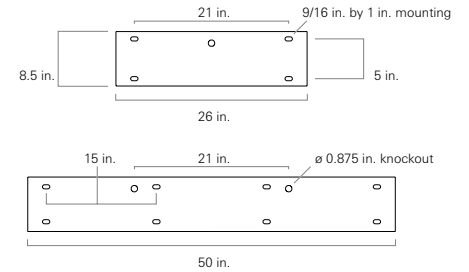

one two three four five six seven eight nine ten eleven twelve thirteen fourteen

SCA

one	Lamps (not included)	six	Voltage	ten	Door Fasteners
14	2 ft. 14 W T5	120	120 V, 60 Hz	AP	Stainless steel allen head with pin
17	2 ft. 17 W T8	277	277 V, 60 Hz	TP	Stainless steel torx head with pin
24	2 ft. 24 W T5 HO	347	347 V, 60 Hz	PH	Phillips head, non-security
4B	2ft. 40 W T5 biax	VAR	Variable, 120-277 V, 50/60Hz	eleven	Mounting Holes
28	4 ft. 28 W T5	seven	Ballast	D	Ceiling and wall mounting holes
32	4 ft. 32 W T8	DM	Dimming	W	Wall mounting holes only
54	4 ft. 54 W T5 HO	EL	Electronic Instant Start, <u>std T8</u>	twelve	Electrical Access
two	Lamp Quantity	PR	Program Rapid Start, <u>std T5, option T8</u>	A	2.250 in. diameter access hole
1	one	eight	Internal Lens	K	0.875 in. diameter knockout(s), <u>std</u>
2	two	53	.125 in. K12 prismatic acrylic	thirteen	UL Listing
3	three	12	.125 in. K12 prismatic polycarbonate	D	Damp Location
three	Material Gauge	15	.156 in. K12 prismatic polycarbonate	W	Wet Location
N	18 gauge, minimum security	16	.187 in. K12 prismatic polycarbonate	fourteen	Options
D	16 gauge, medium security	75	.156 in. C73 prismatic tempered glass	2C	Two-circuit wired
X	14 gauge, maximum security	01	.005 in. UV absorbing overlay	CU	Canadian UL Listing
four	Material	nine	External Lens	E1	One lamp emergency ballast
C	Cold rolled steel	30	.187 in. clear polycarbonate	E2	Two lamp emergency ballast
S	Stainless steel	32	.250 in. clear polycarbonate	FH	Fuse and holder
five	Finish	36	.375 in. clear polycarbonate	NL	Night light, for 7 or 9 W PL pin
R	Brushed stainless steel	38	.500 in. clear polycarbonate	NL-LED	Night light, LED
W	White	90	.187 in. clear tempered glass	IMS	Integral Occ Sensor
		92	.250 in. clear tempered glass	PS	Security push on/off switch
		96	.375 in. clear tempered glass		

Modifications are available to meet custom requirements.