

The ST series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface-mounts to ceilings.

Housing

Die-formed cold rolled steel with seams welded and ground smooth. Stainless steel available.

Door

One piece, die-formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Recessed, stainless steel, tamper-proof fasteners.

Wiring

Reflector-mounted electrical components provide easy wiring and maintenance.

Certifications

UL Listed damp or wet location. Covered ceilings only.


Job Name

Fixture Type

Catalog No.

Approval

Date

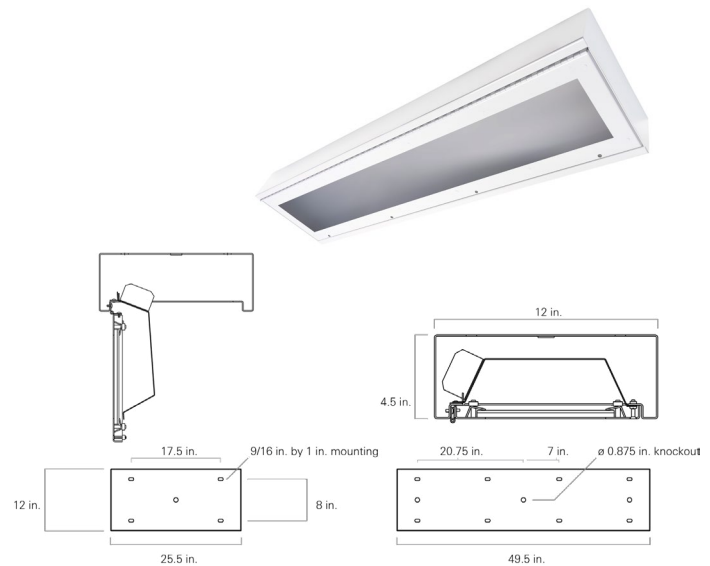

ST	one	two	three	four	five	six	seven	eight	nine	ten	eleven	twelve	thirteen							
	-					-		-	/	-		-								
one	Lamps (not included)					six	Voltage					ten	Door Fasteners							
14	2 ft. 14 W T5					120	120 V, 60 Hz					AP	Stainless steel allen head with pin							
17	2 ft. 17 W T8					277	277 V, 60 Hz					TP	Stainless steel torx head with pin							
24	2 ft. 24 W T5 HO					347	347 V, 60 Hz					PH	Phillips head, non-security							
4B	2 ft. 40 W T5 biax					VAR	Variable, 120-277 V, 50/60Hz					eleven	Electrical Access							
28	4 ft. 28 W T5					seven	Ballast													
32	4 ft. 32 W T8																			
54	4 ft. 54 W T5 HO																			
two	Lamp Quantity					EL	Electronic Instant Start, <u>std T8</u>					K	2.250 in. diameter access hole							
1	one					PR	Program Rapid Start, <u>std T5, option T8</u>					twelve	UL Listing							
2	two																			
3	three																			
three	Material Gauge					eight	Internal Lens					thirteen	Options							
															53	.125 in. acrylic K12 prismatic <u>standard</u>				
															12	.125 in. polycarbonate K12 prismatic				
						15	.156 in. polycarbonate K12 prismatic													
						16	.187 in. polycarbonate K12 prismatic													
						01	.005 in. UV absorbing overlay													
nine	External Lens					30	.187 in. clear polycarbonate					NL-LED	Night light, for 7 or 9 W PL bipin							
four	Material					32	.250 in. clear polycarbonate					IMS	Integral Occ Sensor							
C	Cold rolled steel					36	.375 in. clear polycarbonate					PS	Security push on/off switch							
S	Stainless steel					38	.500 in. clear polycarbonate													
five	Finish					90	.187 in. clear tempered glass													
	R					92	.250 in. clear tempered glass													
	W					96	.375 in. clear tempered glass													

Modifications are available to meet custom requirements.