



STP-LED

High Abuse Recessed Mount Step or Wall **LED**

PRODUCT SPECIFICATION

The STP-LED series is designed for step and detail lighting in high abuse environments.

Mounting

Mounts recessed in step or wall.

Housing

16 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

Door

18 gauge one piece, die formed cold rolled steel. Aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

Hardware

Stainless steel, tamper-proof door fasteners. A mounting bracket and mounting screws are provided.

Driver

0-10VDC dimming

Wiring

All electrical components are mounted to a removable wireway for easy wiring.

Certifications

UL Listed wet location.


Job Name _____

Fixture Type _____


Catalog No. _____

Approval _____ Date _____

Louvered door option

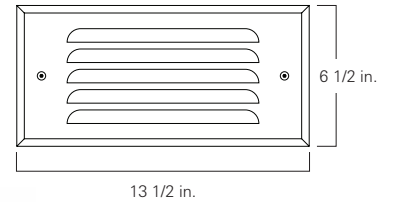

Opal lens option



one

LED

- W White
- R Red
- A Amber

two

Material

- A Aluminum
- C Cold rolled steel
- S Stainless steel

three

Door Finish

- R Brushed stainless steel
- W White

four

Voltage

- VAR Variable, 120-277 V, 50/60Hz

six

Lens

- 52 .125 in. white acrylic
- 53 .125 in. K12 prismatic acrylic
- 12 .125 in. K12 prismatic polycarbonate
- 00 none, only with louvered door option

seven

Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

eight

Options

- CU Canadian UL Listing
- E1 One lamp emergency ballast
- LD Louvered door

Modifications are available to meet custom requirements.