



Surface Lighting STP Series

The STP-LED series is designed for step and detail lighting in high abuse environments.

Mounting

Mounts recessed in step or wall.

Housing

16 gauge cold rolled steel, die formed to shape with seams welded and ground smooth.

Door

18 gauge one piece, die formed cold rolled steel. Aluminum and 304 stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof door fasteners. A mounting bracket and mounting screws are provided.

Driver

(4W) 0-10VDC dimming

Wiring

All electrical components are mounted to a removable wireway for easy wiring.

Certifications

UL Listed damp location.

Applications

- Wall Illumination
- Step Illumination

Job Name _____


Fixture Type _____

Catalog No. _____


Approval _____

Date _____


Louvered door option

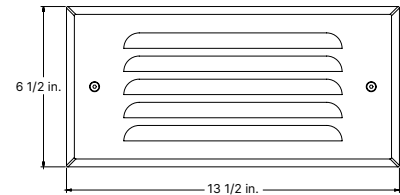

Opal lens option



Amber lens option

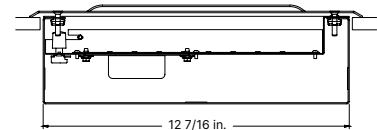

one two three four five six seven eight
STP - VAR DM - - -

one LED
 W White, 4000K only
 R Red
 A Amber

two Door Material
 A Aluminum
 C Cold rolled steel
 S 304 Stainless steel

three Door Finish
 R Brushed (Stainless steel only)
 W White

four Voltage
 VAR Variable, 120-277 V, 50/60Hz

five Driver
 DM (4W) 0-10Vdc Dimming, standard

six Lens
 00 none, only with louvered door option
 12 .125 in. K12 prismatic polycarbonate
 53 .125 in. K12 prismatic acrylic
 122 Optic Plus LED diffusing acrylic lens
 130 .118 Opal polycarbonate

seven Fasteners
 AP Stainless steel allen head with pin
 TP Stainless steel torx head with pin
 PH Phillips, non-security

eight Options
 AM Anti-microbial coating (exposed areas)
 CU Canadian UL Listing
 LD Louvered door

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.