



PRODUCT SPECIFICATION

The SW series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to ceiling. Knockouts on both ends permit continuous fixture mounting.

Lens

One piece, vandal resistant, .156 in., extruded, UV satbilized, prismatic polycarbonate lens.

Housing

16 gauge cold rolled steel, die-formed to shape with seams welded and ground smooth. Additional gauges, aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Stainless steel, tamper-proof fasteners.

Certifications



UL Listed damp or wet location. Covered ceilings only.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

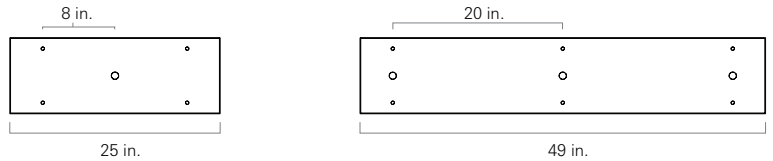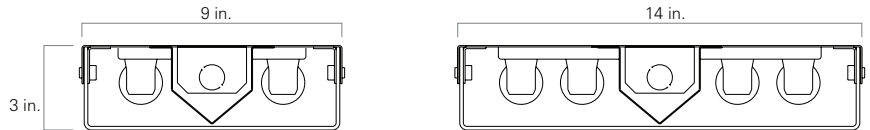

- one Fixture Width**
- 9 9 in. width, two lamp
 - 14 14 in. width, four lamp

- two Lamps (not included)**
- 14 2 ft. 14 W T5
 - 17 2 ft. 17 W T8
 - 24 2 ft. 24 W T5 HO
 - 28 4 ft. 28 W T5
 - 32 4 ft. 32 W T8
 - 54 4 ft. 54 W T5 HO

- three Material Gauge**
- N 18 gauge, minimum security
 - D 16 gauge, medium security, std
 - X 14 gauge, maximum security

- four Material**
- A Aluminum
 - C Cold rolled steel, std
 - S Stainless steel
- five Finish**
- R Brushed stainless steel
 - W White
- six Voltage**
- 120 120 V, 60 Hz
 - 277 277 V, 60 Hz
 - 347 347 V, 60 Hz
 - VAR Variable, 120-277 V, 50/60Hz

- seven Ballast**
- DM Dimming
 - EL Electronic Instant Start, std T8
 - PR Program Rapid Start, std T5, option T8

- eight Lens**
- 15 .156 in. polycarbonate K12 prismatic

- nine Fasteners**
- AP Stainless steel allen head with pin
 - TP Stainless steel torx head with pin
 - PH Phillips, non-security

- ten UL Listing**
- D Damp location
 - W Wet location

- eleven Options**
- 2C Two-circuit wired
 - CU Canadian UL Listing
 - E1 One lamp emergency ballast
 - E2 Two lamp emergency ballast
 - FH Fuse and holder
 - NL Night light, for 7 or 9 W PL bipin
 - NL-LED Night light, LED

Modifications are available to meet custom requirements.